

Sundance® Spas 680 Alicia™

Specifications

Dimensions	69" x 80" x 33" (175 cm x 203 cm x 84 cm)
Seating Capacity	2-3 Adults
Dry Weight	583 lbs (265 kg)
Filled Weight (Average Fill)**	2,418 lbs (1,097 kg)
Water Capacity (Average Fill)	220 US gallons (833 Liters)
Electronic Controls	Solid state electronic controls with LCD readout, programmable temperature, filtration, and heat cycles
Pump 1	North America (60 Hz): 2-Speed, 2.5 HP brake, 1.5 HP continuous, 48 Frame Export: (50 Hz): 2-Speed, 2.0 HP continuous
Total Hydrojets:	21
Seat A Jets:	6 - SLR (Rotational)
Seat B Jets:	1 - SLR (Rotational), 8 - SL (Directional)
Seat C Jets:	4 - SL3R (Rotational)
Footwell (D) Jets:	2 - SLR (Rotational)
Air Controls/Massage Selectors: ...	1/None
Filter:	75 ft² Pleated Filter Cartridge
Water Treatment:	Factory installed ClearRay Active Oxygen® System Export: ClearRay Active Oxygen® System
Lighting:	LED Lighting System (Interior Surround); 2 Standard Exterior Lights
Cabinet:	Available in Slate, Graphite
Shell Colors:	Platinum, Celestite, Morning Mist, Midnight, Travertine, Monaco (while quantities last)
Headrest:	Three, 1-piece gray
Heater:	North America (60 Hz): High Flow, 1 kW@120 VAC or Convertible to 4 kW@240 VAC; Export: (50 Hz): High Flow, 2.7 kW
Electrical Requirements:	North America Convertible Model (60 Hz): 120 VAC@15A with Supplied GFCI Cord or 240 VAC@30A or 40A (Hard Wired Only); Export (50 Hz): 230-240 VAC@1x16A, 1x25A or 2x16A (see manual); or Suitably Rated Circuit Breaker to Comply with Local Electrical Regulations. Certain Countries May Require 2 Power Inputs; Two GFCI/RCD Breakers are Required for This Configuration.
Limited Warranty*:	North America (60 Hz): 5 Years Shell, 3 Years Shell Surface, 3 Years Plumbing Component Leaks, 3 Years Equipment and Controls, 1 Year Cabinet, 1 Year Jets Export (50 Hz): 5 Years Shell, 3 Years Shell Surface, 3 Years Plumbing Component Leaks, 3 Years Equipment and Controls, 1 Year Cabinet, 1 Year Jets
Special Features (Optional):	SmartTub® module
Audio System (Optional):	N/A



*(See Warranty Document for Specific Details)

***(See Important Safety Instructions for Specific Details)

Dimensions/Specifications Subject To Change Without Notice

Sundance Spas 680 Alicia

Operation/Seat Depths



(A) Air control - Activates All Jets

- Jets Pump 1: Powers All Jets when running

21 Total Jets (Stainless Steel Escutcheons Standard)



SL Jets (8)



SLR Jets (9)



SL3R Jets (4)

Spa Operation Subject To Change Without Notice

SEAT DEPTHS

A = 25.86" (65.72 cm)

B = 27.00" (68.58 cm)

C = 24.25" (61.60 cm)

D = 27.75" (70.49 cm)


Listed dimensions represent distance from top of acrylic to lowest point in seat. Tolerance $\pm 0.5"$ (1.27 cm).




Dimensions/Specifications Subject To Change Without Notice

Sundance Spas 680 Alicia

Portable Dimensions

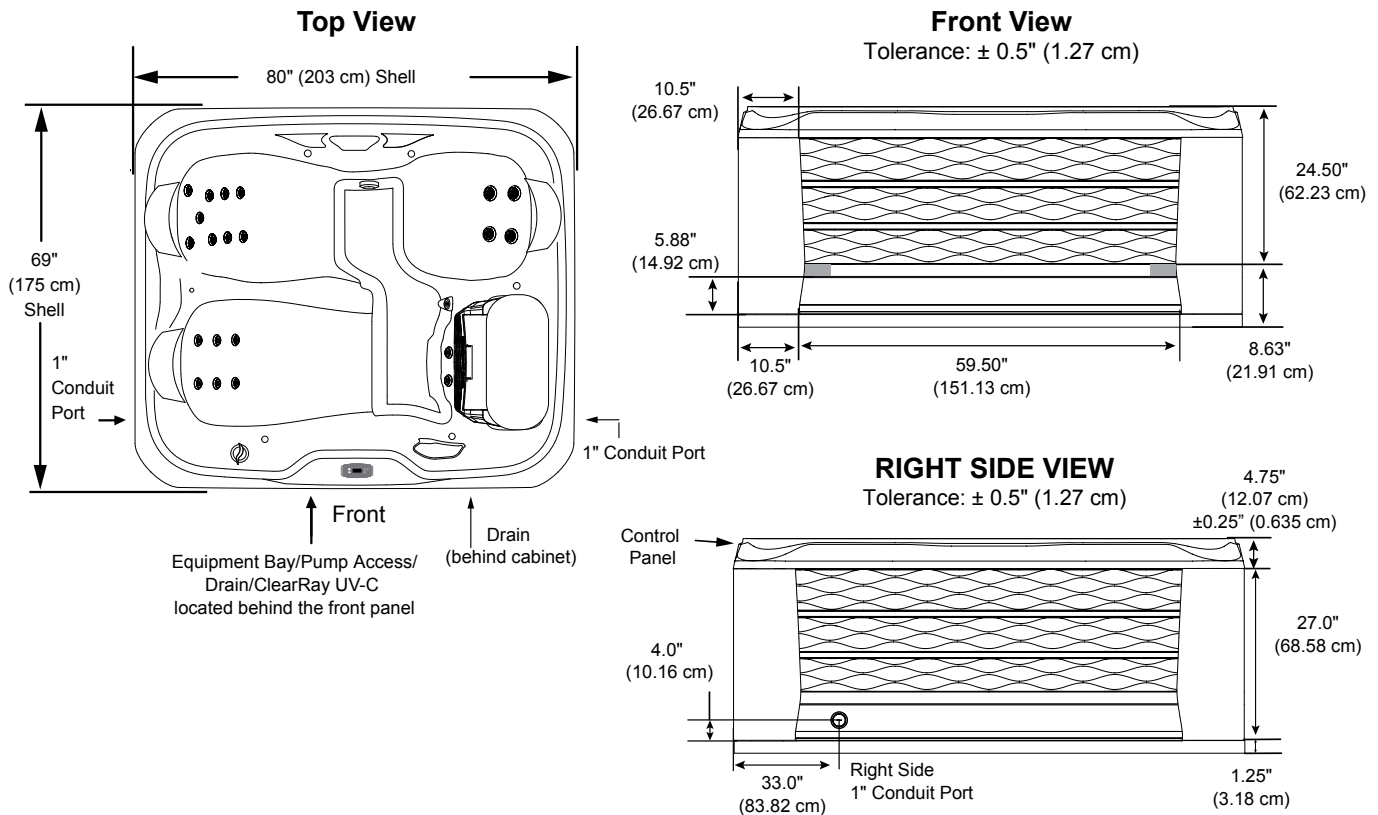

IMPORTANT! Always measure each hot tub for exact dimensions BEFORE designing its foundational support and/or decking.

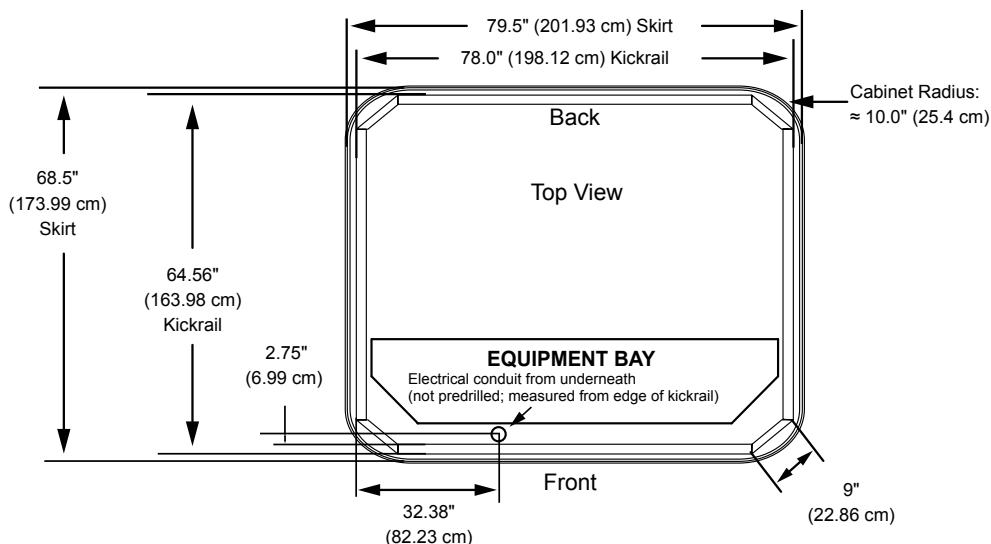

Dimensions/specifications subject to change without notice. Tolerance: $\pm 0.5"$ (1.27 cm)

Dimensions/Specifications Subject To Change Without Notice