

Sundance® Spas 680 Edison®

Specifications

Dimensions:	84" x 84" x 36" (213 cm x 213 cm x 92 cm)
Seating Capacity:	6-7 Adults
Dry Weight:	737 lbs (335 kg)
Filled Weight (Average Fill)**:	3,656 lbs (1,659 kg)
Water Capacity (Average Fill):	350 US Gal (1,325 Liters)
Controls:	Solid-State Electronic Controls with LCD Readout, Programmable Water Temperature, Filtration, and Heat Cycles
Water Delivery:	2 High-Flow Pump
Pump 1:	North America (60 Hz): 2-Speed/2.5 HP Continuous, 11.0A Max., 56 Frame Export (50 Hz): 2-Speed/2.0 HP continuous, 8.0A max.
Pump 2:	North America (60 Hz): 1-Speed/2.5 HP Continuous, 10A max., 56 Frame Export (50 Hz): 1-Speed/2.0 HP continuous, 8.0A max.
Total Hydrojets:	36
Seat A Jets:	2 - SL Directional, 8 - SLR Rotational, 1- SL3 Directional
Seat B Jet:	1 - SL3R Rotational
Seat C Jets:	2 - SL Directional, 6 - SL3 Directional
Seat D Jets:	2 - SL3R Rotational
Seat E Jets:	3 - SL3 Directional, 1- SL5R Rotational
Seat F Jet:	2 - SL Directional, 4 - SL3R Rotational
Foot Well Jets (G):	4 - SL Directional
Air Controls/Massage Selectors:	2/None
Filter:	75 ft² Pleated Filter Cartridge
Water Treatment:	Factory installed ClearRay Active Oxygen® System Export: ClearRay Active Oxygen® System
Lighting:	LED Lighting System (Interior Surround); 2 Standard Exterior Lights
Cabinet:	Available in Slate, Graphite
Shell Colors:	Platinum, Celestite, Morning Mist, Midnight, Travertine, Monaco (while quantities last)
Headrest:	Four, 1-piece gray
Waterfall	One independent flow rate (on or off) adjustment; powered by the pump 1
Heater:	North America (60 Hz): 5.5 kW 240V High Flow Standard Export (50 Hz): 2.7 kW High Flow Standard
Electrical Requirements:	North America (60 Hz): 240 VAC@40A, 50A or 60A Export (50 Hz): 230-240 VAC@1x16A, 1x32A or 2 out of 3-phase (see manual); or Suitably Rated Circuit Breaker to Comply with Local Electrical Regulations. Certain Countries May Require 2 Power Inputs; Two GFCI/ RCD Breakers are Required for This Configuration.
Limited Warranty*:	North America (60 Hz): 5 Years Shell, 3 Years Shell Surface, 3 Years Plumbing Component Leaks, 3 Years Equipment and Controls, 1 Year Cabinet, 1 Year Jets Export (50 Hz): 5 Years Shell, 3 Years Shell Surface, 3 Years Plumbing Component Leaks, 3 Years Equipment and Controls, 1 Year Cabinet, 1 Year Jets
Speial Features (Optional):	SmartTub® module
Audio System (Optional):	N/A



*(See Warranty Document for Specific Details)

** (See Important Safety Instructions for Specific Details)

Dimensions/Specifications Subject To Change Without Notice

Sundance Spas 680 Edison

Operation/Seat Depths



(A) Air control - Activates Seat A Jets (2 - SL, 8 - SLR, 1 - SL3) Seat B Jet (1 - SL3R) + Seat C Jets (2 - SL, 6 - SL3) + Footwell Jets (2 - SL)

(B) Air Control - Activates Seat D Jets (2 - SL3R) + Seat E Jets (3 - SL3, 1 - SL5R) + Seat F Jets (2 - SLR3, 4 - SL3R) + Footwell Jets (2 - SL)

(C) Waterfall Valve - Adjust water flow to the waterfall.

- Jets Pump 1: Powers Seat D Jets + Seat E Jets + Seat F + Footwell Jets (qty 2) when running

- Jets Pump 2: Seat A Jets + Seat B Jet + Seat C Jets + Footwell Jets (qty 2) when running

36 Total Jets (Stainless Steel Escutcheons Standard)



SL Jets (10)



SLR Jets (8)



SL3 Jets (10)



SL3R Jets (7)



SL5R Jet (1)

Spa Operation Subject To Change Without Notice

SEAT DEPTHS

A = 23.50" (59.69 cm)

B = 20.75" (52.71 cm)

C = 25.00" (63.50 cm)

D = 22.00" (55.88 cm)

E = 25.50" (64.77 cm)

F = 23.75" (60.33 cm)

G = 21.75" (54.25 cm)

H = 30.00" (76.20 cm)


Listed dimensions represent distance from top of acrylic to lowest point in seat. **Tolerance $\pm 0.5"$ (1.27 cm).**



Dimensions/Specifications Subject To Change Without Notice

Sundance Spas 680 Edison



Portable Dimensions

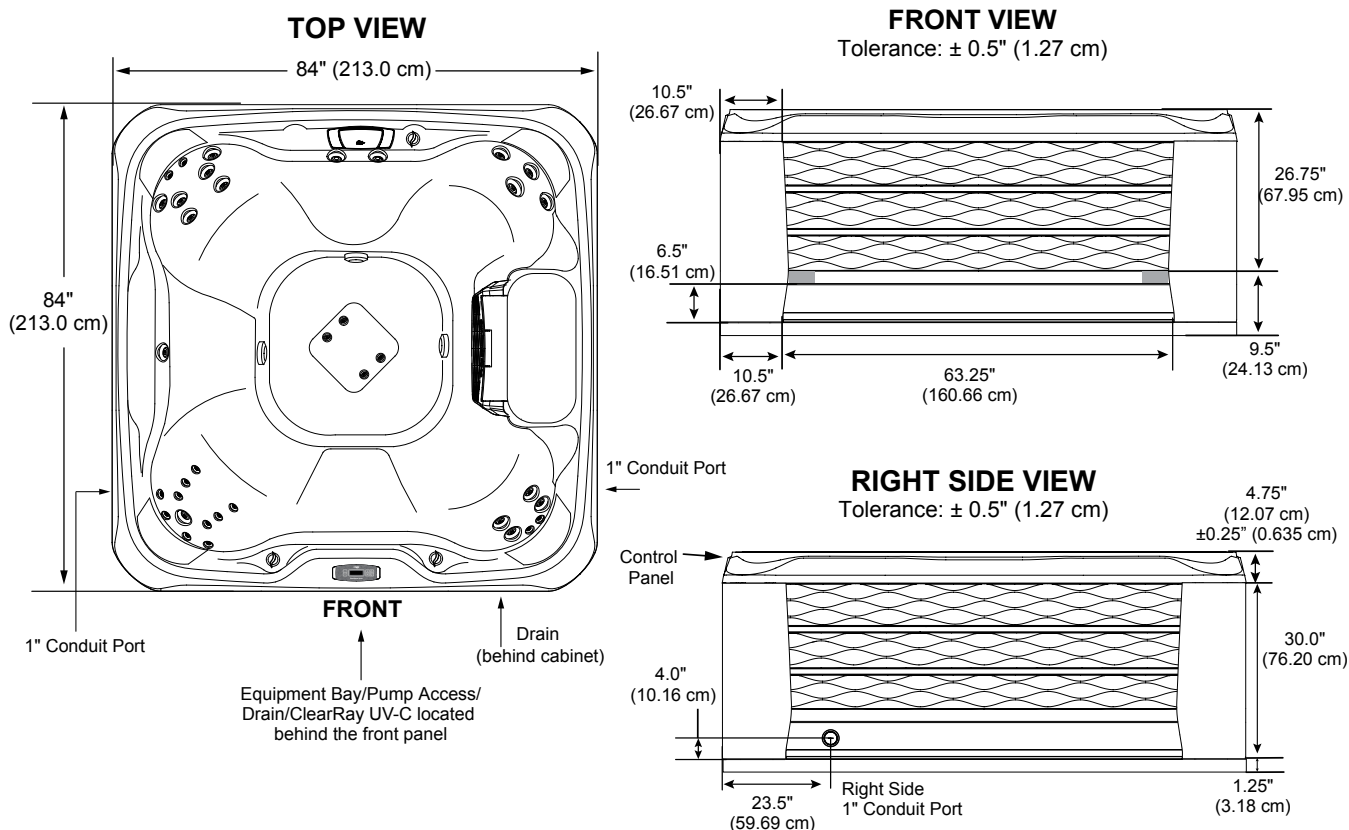

IMPORTANT! Always measure each hot tub for exact dimensions BEFORE designing its foundational support and/or decking.



4 x $\approx R 10.0"$
($\approx R 25.4$ cm) Skirt

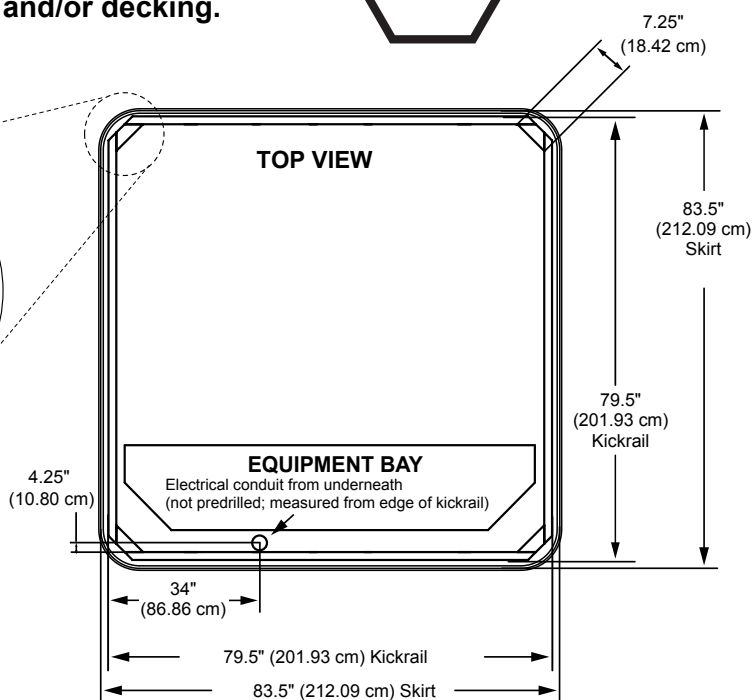

Dimensions/specifications subject to change without notice. Tolerance: $\pm 0.5"$ (1.27 cm)

Dimensions/Specifications Subject To Change Without Notice