

Sundance® Spas 680™ McKinley™

Specifications

Dimensions:	89" x 89" x 36" (226 cm x 226 cm x 92 cm)	
Seating Capacity:	6-7 Adults	
Dry Weight:	787 lbs (357 kg)	
Filled Weight (Average Fill)**:	4,248 lbs (1,927 kg)	
Water Capacity (Average Fill):	415 US Gal (1,571 Liters)	
Controls:	Solid-State Electronic Controls with LCD Readout, Programmable Water Temperature, Filtration, and Heat Cycles	
Water Delivery:	2 High Flow Pumps	
Pump 1:	North America (60 Hz): 2-Speed/2.5 HP Continuous, 11.0A Max., 56 Frame Export (50 Hz): 2-Speed/2.0 HP continuous, 8.0A max.	
Pump 2:	North America (60 Hz): 1-Speed/2.5 HP Continuous, 10.0A Max., 56 Frame Export (50 Hz): 1-Speed/2.0 HP continuous, 8.0A max.	
Optional Pump 3:	N/A	
Total Hydrojets:	42	
Seat A Jets:	2 - SL Directional, 4 - SL3R Rotational	
Seat B Jets:	2 - SL5 Directional	
Seat C Jets:	2 - SL Directional, 8 - SLR Rotational, 1 - SL3 Directional	
Seat D Jet:	1 - SL5 Directional	
Seat E Jets:	2 - SL Directional, 6 - SL3 Directional	
Seat F Jets:	4 - SL3R Rotational, 2 - SL5R Rotational	
Footwell Jets (G):	8 - SL Directional	
Air Controls/Massage Selectors:	2/None	
Filter:	75 ft² Pleated Filter Cartridge	
Water Treatment:	Factory installed ClearRay Active Oxygen® System Export: ClearRay Active Oxygen® System	
Lighting:	LED Lighting System (Interior Surround); 2 Standard Exterior Lights	
Cabinet:	Available in Slate, Graphite	
Shell Colors:	Platinum, Celestite, Morning Mist, Midnight, Travertine, Monaco (while quantities last)	
Headrests:	Four, 1-Piece Gray	
Waterfall	One independent flow rate (on or off) adjustment; powered by the pump 1	
Heater:	North America (60 Hz): 5.5 kW, 240V High Flow Standard Export (50 Hz): 2.7 kW High Flow Standard	
Electrical Requirements:	240 VAC, 60 Hz@40A, 50A or 60A Export (50 Hz): 230-240 VAC@1x16A, 1x32A or 2 out of 3-phase (see manual); or Suitably Rated Circuit Breaker to Comply with Local Electrical Regulations. Certain Countries May Require 2 Power Inputs; Two GFCI/RCD Breakers are Required for This Configuration.	
Limited Warranty*	North America (60 Hz): 5 Years Shell, 3 Years Shell Surface, 3 Years Equipment and Controls, 3 Years Plumbing Component Leaks, 1 Year Cabinet, 1 Year Jets Export (50 Hz): 5 Years Shell, 3 Years Shell Surface, 3 Years Plumbing Component Leaks, 3 Years Equipment and Controls, 1 Year Cabinet, 1 Year Jets	
Special Features (Optional):	SmartTub® module	
Audio System (Optional):	N/A	

*(See Warranty Document for Specific Details)

** (See Important Safety Instructions for Specific Details)

Dimensions/Specifications Subject To Change Without Notice

Sundance Spas 680 McKinley

Operation/Seat Depths



(A) Air Control 1 - Activates Seat A Jets (2 - SL, 4 - SL3R) + Seat B Jets (2 - SL5) + Seat C (2 - SL, 8 - SLR, 1 - SL3) + Seat D Jet (1 - SL5) + Footwell Jets (4 - SL)

(B) Air Control 2 - Activates Seat E Jets (2 - SL, 6 - SL3) + Seat F (4 - SL3R, 2 - SL5R) + Footwell Jets (4 - SL)

(C) Waterfall Valve - Adjust water flow to the waterfall.

- Jets Pump 1: Powers Seat A Jets + Seat B Jets + Seat C Jets + Seat D Jet + 4 Footwell Jets when running

- Jets Pump 2: Powers Seat E Jets + Seat F Jets + 4 Footwell Jets when running

42 Total Jets (Stainless Steel Escutcheons Standard)



SL Jets (14)



SLR Jets (8)



SL3 Jets (7)



SL3R Jets (8)



SL5 Jets (3)



SL5R Jets (2)

Spa Operation Subject To Change Without Notice

SEAT DEPTHS

A = 25.63" (65.09 cm)

B = 23.00" (58.42 cm)

C = 27.00" (68.58 cm)

D = 22.13" (56.20 cm)

E = 27.25" (69.22 cm)

F = 26.75" (67.95 cm)

G = 20.00" (50.80 cm)

H = 30.00" (76.20 cm)


Listed dimensions represent distance from top of acrylic to lowest point in seat. **Tolerance $\pm 0.5"$ (1.27 cm).**




Dimensions/Specifications Subject To Change Without Notice

Sundance Spas 680 McKinley

Portable Dimensions

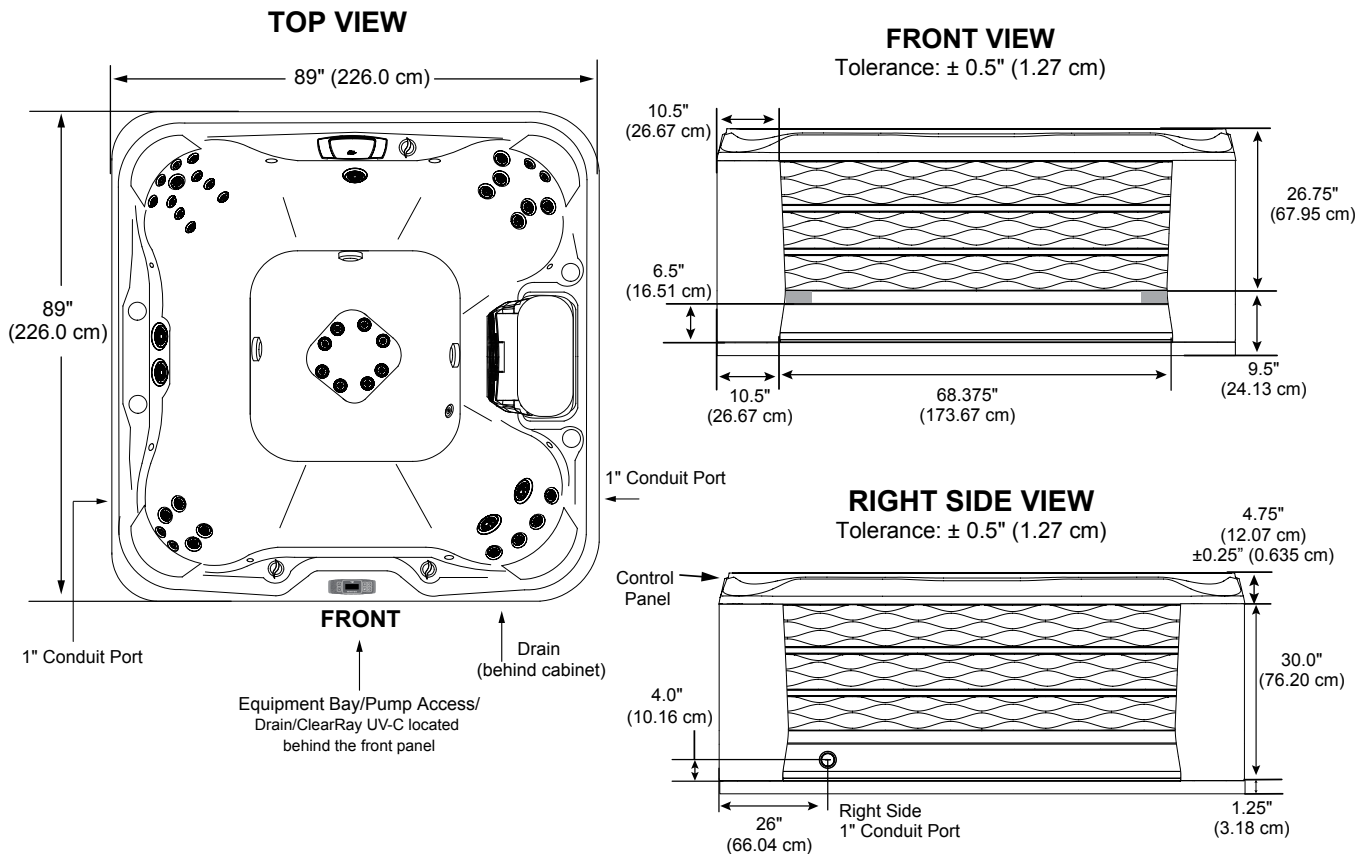

IMPORTANT! Always measure each hot tub for exact dimensions BEFORE designing its foundational support and/or decking.

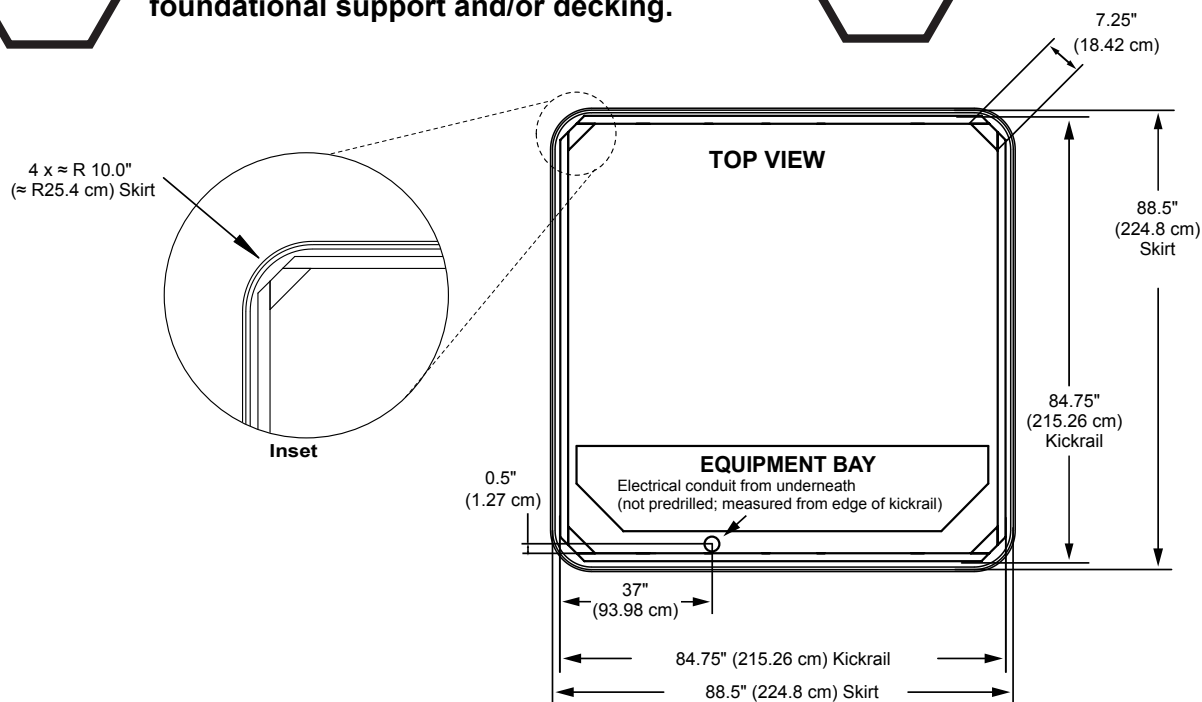

Dimensions/specifications subject to change without notice. Tolerance: $\pm 0.5"$ (1.27 cm)

Dimensions/Specifications Subject To Change Without Notice