

Sundance® Spas 680 Peyton®

Specifications

<p>Dimensions:.....84" x 84" x 36" (213 cm x 213 cm x 92 cm)</p> <p>Seating Capacity:.....5-6 Adults</p> <p>Dry Weight:.....736 lbs (334 kg)</p> <p>Filled Weight (Average Fill)**:.....3,572 lbs (1,621 kg)</p> <p>Water Capacity (Average Fill):.....340 US Gal (1,288 Liters)</p> <p>Controls:.....Solid-State Electronic Controls with LCD Readout, Programmable Water Temperature, Filtration, and Heat Cycles</p> <p>Water Delivery:.....2 High-Flow Pump</p> <p>Pump 1:.....North America (60 Hz): 2-Speed/2.5 HP Continuous, 11.0A Max., 56 Frame Export (50 Hz): 2-Speed/2.0 HP continuous, 8.0A max.</p> <p>Pump 2:.....North America (60 Hz): 1-Speed/2.5 HP Continuous, 10A max., 56 Frame Export (50 Hz): 1-Speed/2.0 HP continuous, 8.0A max.</p> <p>Total Hydrojets:.....34</p> <p>Seat A Jets:.....4 - SL3R Rotational, 2 - SL5R Rotational</p> <p>Seat B Jets:.....2 - SL3R Rotational</p> <p>Seat C Jets:.....2 - SLR Rotational, 2 - SL Directional, 8 - SL3 Directional</p> <p>Seat D Jet:.....1 - SL3R Rotational</p> <p>Seat E Jets:.....2 - SLR Rotational, 8 - SL Directional, 1 - SL3 Directional</p> <p>Foot Well Jets (F):.....2 - SL3 Directional</p> <p>Air Controls/Massage Selectors:...2/None</p> <p>Filter:.....75 ft² Pleated Filter Cartridge</p> <p>Water Treatment:.....Factory installed ClearRay Active Oxygen® System Export: ClearRay Active Oxygen® System</p> <p>Lighting:.....LED Lighting System (Interior Surround); 2 Standard Exterior Lights</p> <p>Cabinet:.....Available in Slate, Graphite</p> <p>Shell Colors:.....Platinum, Celestite, Morning Mist, Midnight, Travertine, Monaco (while quantities last)</p> <p>Headrest:.....Three, 1-piece gray</p> <p>Waterfall.....One independent flow rate (on or off) adjustment; powered by the pump 1</p> <p>Heater:.....North America (60 Hz): 5.5 kW 240V High Flow Standard Export (50 Hz): 2.7 kW High Flow Standard</p> <p>Electrical Requirements:.....North America (60 Hz): 240 VAC@40A, 50A or 60A Export (50 Hz): 230-240 VAC@1x16A, 1x32A or 2 out of 3-phase (see manual); or Suitably Rated Circuit Breaker to Comply with Local Electrical Regulations. Certain Countries May Require 2 Power Inputs; Two GFCI/ RCD Breakers are Required for This Configuration.</p> <p>Limited Warranty*:.....North America (60 Hz): 5 Years Shell, 3 Years Shell Surface, 3 Years Plumbing Component Leaks, 3 Years Equipment and Controls, 1 Year Cabinet, 1 Year Jets Export (50 Hz): 5 Years Shell, 3 Years Shell Surface, 3 Years Plumbing Component Leaks, 3 Years Equipment and Controls, 1 Year Cabinet, 1 Year Jets</p> <p>Special Features (Optional):.....SmartTub® module</p> <p>Audio System (Optional):.....N/A</p>	
--	---

*(See Warranty Document for Specific Details)

***(See Important Safety Instructions for Specific Details)

Dimensions/Specifications Subject To Change Without Notice

Sundance Spas 680 Peyton

Operation/Seat Depths



- (A)** Air Control - Activates Seat A Jets (4 - SL3R, 2 - SL5R) + Seat B Jets (2 - SL3R) + Seat E Jets (2 - SLR, 8 - SL, 1 - SL3) + Footwell Jets (2 - SL3)
 - (B)** Air Control - Activates Seat C Jets (2 - SLR, 2 - SL, 8 - SL3) + Seat D Jet (1 - SLR)
 - (C)** Waterfall Valve - Adjust water flow to the waterfall.
- Jets Pump 1: Powers Seat A Jets + Seat B Jets + Seat E Jets + Footwell Jets when running
 - Jets Pump 2: Seat C Jets + Seat D Jet when running

34 Total Jets (Stainless Steel Escutcheons Standard)




Spa Operation Subject To Change Without Notice

SEAT DEPTHS

- A = 26.63" (67.63 cm)**
- B = 22.50" (57.15 cm)**
- C = 25.00" (63.50 cm)**
- D = 22.00" (55.88 cm)**
- E = 22.50" (57.15 cm)**
- F = 26.88" (69.85 cm)**
- G = 19.75" (50.16 cm)**
- H = 30.00" (76.20 cm)**


Listed dimensions represent distance from top of acrylic to lowest point in seat. **Tolerance ± 0.5" (1.27 cm).**

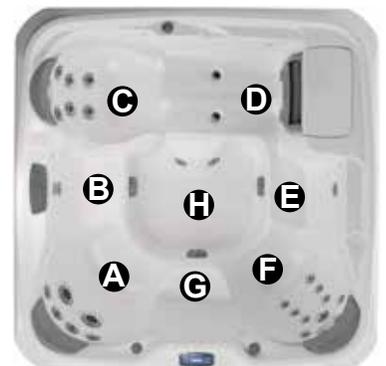


Dimensions/Specifications Subject To Change Without Notice

Sundance Spas 680 Peyton

Portable Dimensions

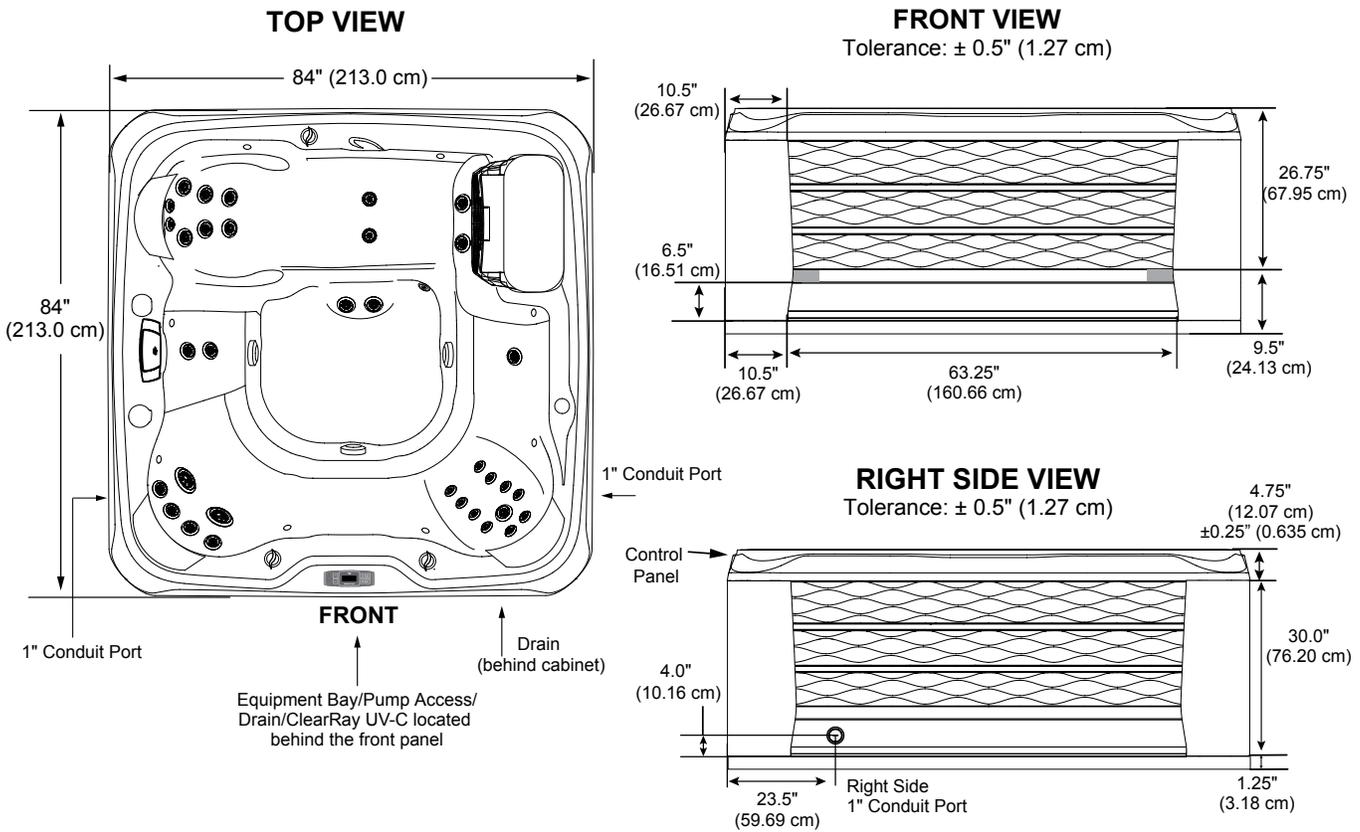

IMPORTANT! Always measure each hot tub for exact dimensions **BEFORE** designing its foundational support and/or decking.

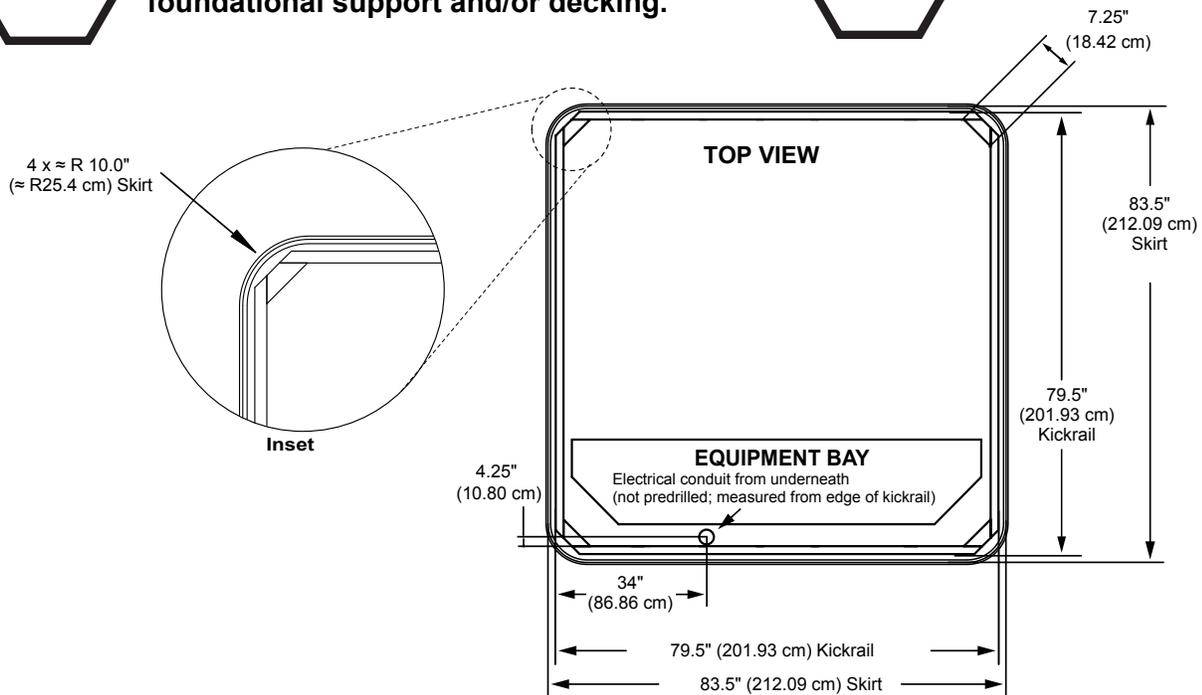

Dimensions/specifications subject to change without notice. Tolerance: $\pm 0.5"$ (1.27 cm)

Dimensions/Specifications Subject To Change Without Notice