

Sundance® Spas 680 Prado™

Specifications

Dimensions	80" x 80" x 33" (203 cm x 203 cm x 84 cm)
Seating Capacity	5-6 Adults
Dry Weight	603 lbs (274 kg)
Filled Weight (Average Fill)**	3,555 lbs (1,613 kg)
Water Capacity (Average Fill)	354 US gallons (1,341 Liters)
Electronic Controls	Solid state electronic controls with LCD readout, programmable temperature, filtration, and heat cycles
Pump 1	North America (60 Hz): 2-Speed, 2.5 HP brake, 1.5 HP continuous, 48 Frame Export (50 Hz): 2-Speed, 2.0 HP continuous
Total Hydrojets:	26
Seat A Jets:	3 - SL3 Directional, 1 - SL5R Rotational
Seat B Jets:	2 - SLR Rotational, 1 - SL3 Directional, 8 - SL Directional
Seat C Jet:	1 - SL3R Rotational
Seat D Jets:	6 - SL3 Directional
Seat E Jets:	4 - SL3R Rotational
Air Controls/Massage Selectors:	2/None
Filter:	75 ft² Pleated Filter Cartridge
Water Treatment:	Factory installed ClearRay Active Oxygen® System Export: ClearRay Active Oxygen® System
Lighting:	LED Lighting System (Interior Surround); 2 Standard Exterior Lights
Cabinet:	Available in Slate, Graphite
Shell Colors:	Platinum, Celestite, Morning Mist, Midnight, Travertine, Monaco (while quantities last)
Headrest:	Four, 1-piece gray
Heater:	North America (60 Hz): High Flow, 1 kW@120 VAC or Convertible to 4 kW@240 VAC; Export (50 Hz): High Flow, 2.7 kW
Electrical Requirements:	North America Convertible Model (60 Hz): 120 VAC@15A with Supplied GFCI Cord or 240 VAC@30A or 40A (Hard Wired Only); Export (50 Hz): 230-240 VAC@1x16A, 1x25A or 2 out of 3-phase (see manual); or Suitably Rated Circuit Breaker to Comply with Local Electrical Regulations. Certain Countries May Require 2 Power Inputs; Two GFCI/ RCD Breakers are Required for This Configuration.
Limited Warranty*:	North America (60 Hz): 5 Years Shell, 3 Years Shell Surface, 3 Years Plumbing Component Leaks, 3 Years Equipment and Controls, 1 Year Cabinet, 1 Year Jets Export (50 Hz): 5 Years Shell, 3 Years Shell Surface, 3 Years Plumbing Component Leaks, 3 Years Equipment and Controls, 1 Year Cabinet, 1 Year Jets
Special Features (Optional):	Factory Installed SmartTub® module
Audio System (Optional):	N/A



*(See Warranty Document for Specific Details)

** (See Important Safety Instructions for Specific Details)

Dimensions/Specifications Subject To Change Without Notice

Sundance Spas 680 Prado

Operation/Seat Depths



(A) Air control - Activates Seat A Jets (3 - SL3, 1 - SL5R) + Seat B Jets (1 - SLR, 1 - SL3, 8 - SL) + Seat C Jet (1 - SL3R)

(B) Air control - Activates Seat D Jets (6 - SL3) + Seat E Jets (4 - SL3R)

• Jets Pump 1: Powers All Jets when running

26 Total Jets (Stainless Steel Escutcheons Standard)



SL Jets (8)



SLR Jets (2)



SL3 Jets (10)



SL3R Jets (5)



SL5R Jet (1)

Spa Operation Subject To Change Without Notice

SEAT DEPTHS

A = 23.50" (59.69 cm)

B = 20.75" (52.71 cm)

C = 25.00" (63.50 cm)

D = 22.00" (55.88 cm)

E = 25.50" (64.77 cm)

F = 23.75" (60.33 cm)

G = 21.75" (55.25 cm)

H = 30.00" (76.20 cm)


Listed dimensions represent distance from top of acrylic to lowest point in seat. **Tolerance $\pm 0.5"$ (1.27 cm).**




Dimensions/Specifications Subject To Change Without Notice

Sundance Spas 680 Prado

Portable Dimensions

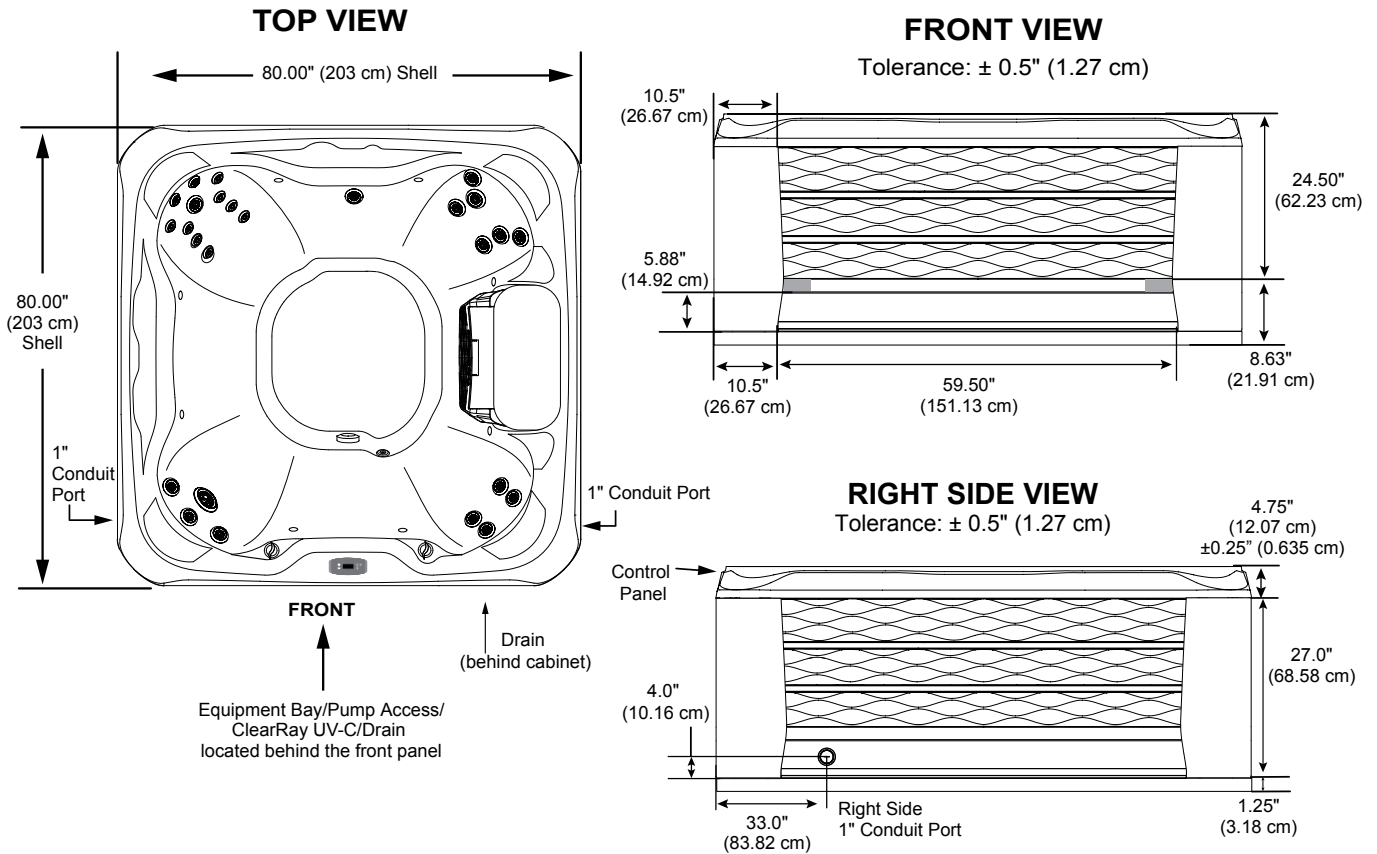

IMPORTANT! Always measure each hot tub for exact dimensions BEFORE designing its foundational support and/or decking.

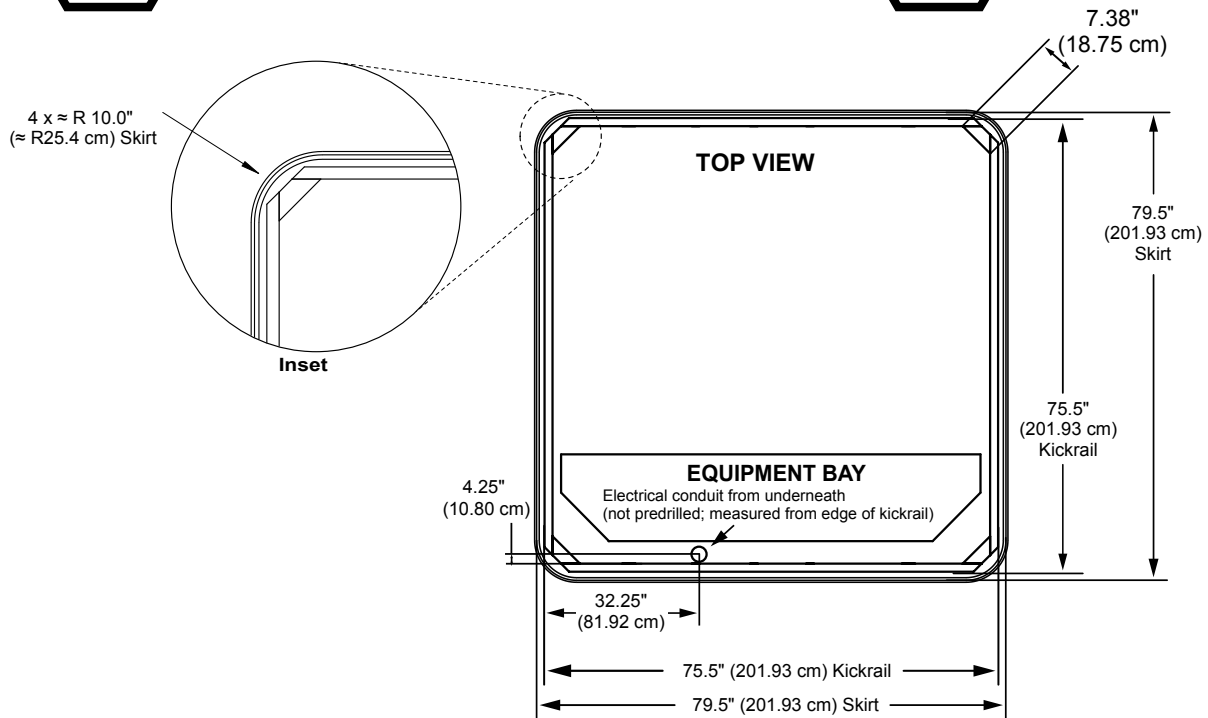

Dimensions/Specifications Subject To Change Without Notice