


# Sundance® Spas 780 Bristol™

## Specifications

|                                        |                                                                                                                                                                                                                                                                                                                                                                                               |
|----------------------------------------|-----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| <b>Dimensions:</b>                     | 84" x 84" x 37.5" (213 cm x 213 cm x 96 cm)                                                                                                                                                                                                                                                                                                                                                   |
| <b>Seating Capacity:</b>               | 5-6 Adults                                                                                                                                                                                                                                                                                                                                                                                    |
| <b>Dry Weight:</b>                     | 745 lbs (338 kg)                                                                                                                                                                                                                                                                                                                                                                              |
| <b>Filled Weight (Average Fill)**:</b> | 3,539 lbs (1,606 kg)                                                                                                                                                                                                                                                                                                                                                                          |
| <b>Water Capacity (Average Fill):</b>  | 335 US Gal (1,269 Liters)                                                                                                                                                                                                                                                                                                                                                                     |
| <b>Controls:</b>                       | Solid-State Electronic Touchscreen Controls, Programmable Water Temperature, Filtration, and Heat Cycles                                                                                                                                                                                                                                                                                      |
| <b>Water Delivery:</b>                 | 2 High Flow Pump                                                                                                                                                                                                                                                                                                                                                                              |
| <b>Pump 1:</b>                         | North America (60 Hz): 1-Speed/2.5 HP Continuous, 12.0A Max., 56 Frame<br><b>Export (50 Hz): 1-Speed/2.0 HP Continuous, 8.0A Max.</b>                                                                                                                                                                                                                                                         |
| <b>Pump 2:</b>                         | North America (60 Hz): 1-Speed/2.5 HP Continuous, 11A Max., 56 Frame<br><b>Export (50 Hz): 1-Speed/2.0 HP Continuous, 7.0A Max.</b>                                                                                                                                                                                                                                                           |
| <b>Pump 3:</b>                         | 24 Hour Programmable Circ Pump, 8 Hour Factory Default                                                                                                                                                                                                                                                                                                                                        |
| <b>Total Hydrojets:</b>                | <b>38</b>                                                                                                                                                                                                                                                                                                                                                                                     |
| <b>Seat A Jets :</b>                   | 4 Mini Vortex, 2 Fluidix Intelli-Jets                                                                                                                                                                                                                                                                                                                                                         |
| <b>Seat B Jets:</b>                    | 2 Mini Vortex                                                                                                                                                                                                                                                                                                                                                                                 |
| <b>Seat C Jets:</b>                    | 2 SMT Micro, 6 SMT Fluidix, 6 Adjustable Accu-Pressure, 2 Mini Vortex                                                                                                                                                                                                                                                                                                                         |
| <b>Seat D Jets:</b>                    | 1 Vortex                                                                                                                                                                                                                                                                                                                                                                                      |
| <b>Seat E Jets:</b>                    | 2 SMT Micro, 9 Accu-Pressure                                                                                                                                                                                                                                                                                                                                                                  |
| <b>Footwell Jets (F):</b>              | 2 Mini Vortex                                                                                                                                                                                                                                                                                                                                                                                 |
| <b>Air Controls/Massage Selectors:</b> | 3/2 Standard air control with LED lights                                                                                                                                                                                                                                                                                                                                                      |
| <b>Filter:</b>                         | MicroClean® Ultra II Lite Filtration System, 130 ft² (2 interlocking cartridge filters)                                                                                                                                                                                                                                                                                                       |
| <b>Water Treatment:</b>                | 8-Hour Circulation Pump; Factory installed ClearRay Active Oxygen® System<br><b>Export: ClearRay Active Oxygen® System</b>                                                                                                                                                                                                                                                                    |
| <b>Lighting:</b>                       | Standard Multi-Colored LED Light; 6 LED Pin Lights; Indicator light; Air controls and Exterior Lights (4 stainless steel white lights on front cabinet)                                                                                                                                                                                                                                       |
| <b>Synthetic Cabinet:</b>              | Available in Modern Hardwood, Brushed Gray and Vintage Oak                                                                                                                                                                                                                                                                                                                                    |
| <b>Shell Colors:</b>                   | Platinum, Celestite, Morning Mist, Midnight, Travertine, Monaco (while quantities last)                                                                                                                                                                                                                                                                                                       |
| <b>Handrails:</b>                      | N/A                                                                                                                                                                                                                                                                                                                                                                                           |
| <b>Headrests:</b>                      | Three, 1-Piece Gray                                                                                                                                                                                                                                                                                                                                                                           |
| <b>Heater:</b>                         | North America (60 Hz): 5.5 kW, High Flow<br><b>Export (50 Hz): High Flow, 2.7 kW</b>                                                                                                                                                                                                                                                                                                          |
| <b>Electrical Requirements:</b>        | North America (60 Hz): 240 VAC@40A, 50A, or 60A;<br><b>Export (50 Hz): 230-240 VAC@1x32A, 1x16A/1x20A, or 3x16A (see manual for more configurations); or Suitably Rated Circuit Breaker to Comply with Local Electrical Regulations. Certain Countries May Require Dual Power Inputs; Two GFCI/RCD Breakers are Required for This Configuration.</b>                                          |
| <b>Limited Warranty*:</b>              | North America (60 Hz): 10 Years Shell, 7 Years Shell Surface, 5 Years Plumbing Component Leaks, 5 Years Equipment and Controls, 5 Years Cabinet, 2 Years Jets, 2 Years Lights, 1 Year Stereo<br><b>Export (50 Hz): 10 Years Shell, 7 Years Shell Surface, 5 Years Plumbing Component Leaks, 5 Years Equipment and Controls, 5 Years Cabinet, 2 Years Jets, 2 Years Lights, 2 Years Stereo</b> |
| <b>Waterfall Feature:</b>              | On/Off Flow Rate on when circulation pump is running; Colored Lighting                                                                                                                                                                                                                                                                                                                        |
| <b>Audio System (Optional):</b>        | Factory Installed BLUEWAVE® Spa Stereo System with an Auxiliary 3.5 mm headphone jack connection and Bluetooth® compatible                                                                                                                                                                                                                                                                    |
| <b>Special Features (Standard):</b>    | SmartTub® module<br><b>Export: SmartTub® module (optional)</b>                                                                                                                                                                                                                                                                                                                                |




\*(See Warranty Document for Specific Details)

\*\* (See Important Safety Instructions for Specific Details)


# Sundance Spas 780 Bristol

## Operation/Seat Depths

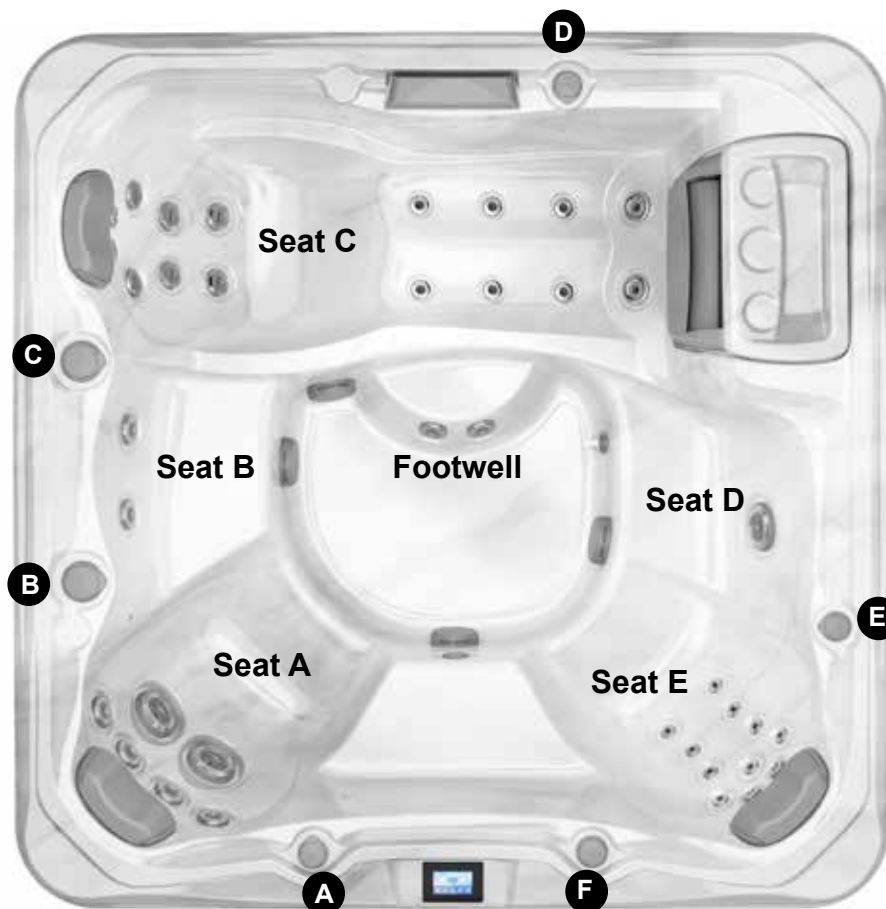

- (A) Air Control - Activates Seat A Jets (2 Mini Vortex, 2 Fluidix Intelli-Jets)
- (B) Massage Selector [Pump 2]- Adjusts Massage Level Between Seat B Jets + Seat D Jet + Footwell Jets and Seat E Jets
- (C) Massage Selector [Pump 1]- Adjusts Massage Level Between Seat C Jets and Seat A Jets
- (D) Air Control - Seat C Jets (2 SMT Micro, 6 SMT Fluidix, 6 Adjustable Accu-Pressure, 2 Mini Vortex)
- (E) Air Control - Activates Seat E Jets (2 SMT Micro, 9 Accu-Pressure) + Seat D Jets (2 Vortex) + Seat D Jets (2 Vortex) + Footwell Jets (2 Mini Vortex)
- (F) Waterfall Selector [8-Hour Circ. Pump] - Controls Waterfall Output

### 38 Total Jets (Stainless Steel Escutcheons Standard)



Spa Operation Subject To Change Without Notice

## SEAT DEPTHS

A = 27.00" (68.58 cm)  
B = 19.50" (49.53 cm)  
C = 25.25" (64.14 cm)  
D = 26.25" (66.68 cm)

E = 27.50" (69.85 cm)  
F = 18.25" (46.36 cm)  
G = 32.70" (83.06 cm)


Listed dimensions represent distance from top of acrylic to lowest point in seat. **Tolerance  $\pm 0.5"$  (1.27 cm).**




Dimensions/Specifications Subject To Change Without Notice

# Sundance Spas 780 Bristol

## Portable Dimensions

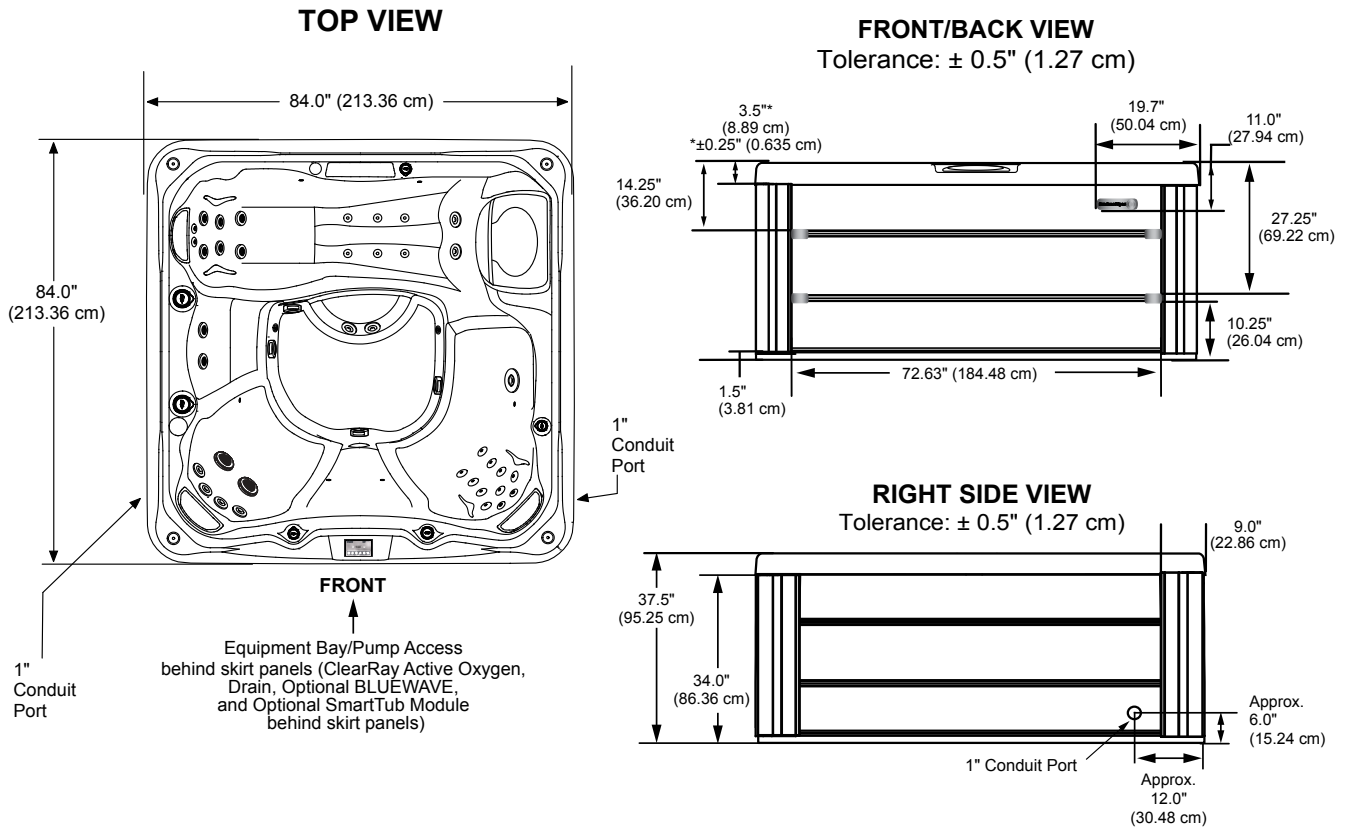

**IMPORTANT! Always measure each hot tub for exact dimensions BEFORE designing its foundational support and/or decking.**

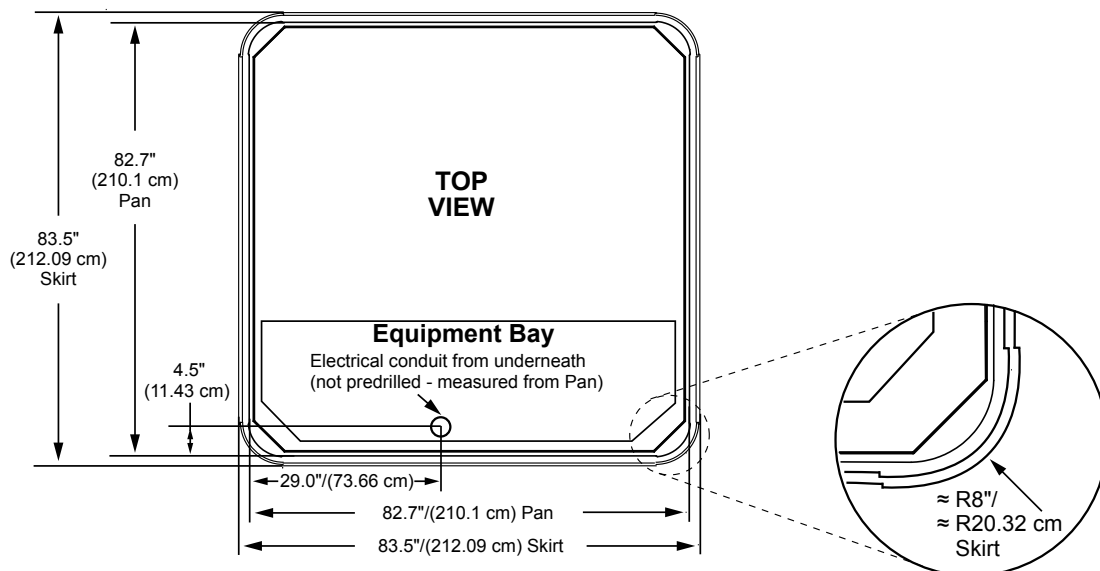

Dimensions/specifications subject to change without notice. Tolerance:  $\pm 0.5"$  (1.27 cm)

Dimensions/Specifications Subject To Change Without Notice