


Sundance® Spas 780 Dover™

Specifications

Dimensions:	69" x 82" x 31" (176 cm x 209 cm x 79 cm)
Seating Capacity:	3 Adults
Dry Weight:	620 lbs (282 kg)
Filled Weight (Average Fill)**:	2,497 lbs (1,133 kg)
Water Capacity (Average Fill):	225 US Gal (852 Liters)
Controls:	Solid-State Electronic Touchscreen Controls, Programmable Water Temperature, Filtration, and Heat Cycles
Water Delivery:	1 High-flow pump
Pump 1:	North America (60 Hz): 2-Speed/1.5 HP Continuous, 13.0A Max., 48 Frame Export (50 Hz): 2-Speed/2.0 HP Continuous, 8.0A max.
Pump 2:	24-Hour Filter/Circulation Pump
Total Hydrojets:	23
Seat A Jets:	2 SMT Micro, 6 SMT Fluidix, 2 Mini Vortex
Seat B Jets:	2 Fluidix Intelli-Jets
Seat C Jets:	2 SMT Micro, 9 Accu-Pressure
Air Controls/Massage Selectors:	3/1 Standard air control LED lights
Filter:	MicroClean® Ultra II Lite Filtration System, 130 ft² (2 interlocking cartridge filters)
Water Treatment:	8-Hour Circulation Pump; Factory installed ClearRay Active Oxygen® System Export: ClearRay Active Oxygen® System
Lighting:	Standard Multicolored LED Light; 4 LED Pin Lights; Indicator light; Air controls and Exterior Lights (4 stainless steel white lights on front cabinet)
Synthetic Cabinet:	Available in Modern Hardwood, Brushed Gray and Vintage Oak
Shell Colors:	Platinum, Celestite, Morning Mist, Midnight, Travertine, Monaco (while quantities last)
Handrails:	N/A
Headrests:	Three, 1-Piece Gray
Heater:	North America Convertible Model (60 Hz): Low Flow, 1 kW@120 VAC or Convertible to 4 kW@240 VAC Export (50 Hz): Low flow, 2.7 kW
Electrical Requirements:	North America Convertible Model (60 Hz): 120 VAC@15A with Supplied GFCI Cord or 240 VAC@30A or 40A (Hard Wired Only); Export (50 Hz): 230-240 VAC@1x16A, 1x25A or 2x16A (see manual for more configurations); or suitably Rated Circuit Breaker to Comply with Local Electrical Regulations. Certain Countries May Require Dual Power Inputs; Two GFCI/RCD Breakers are Required for This Configuration.
Limited Warranty*:	North America (60 Hz): 10 Years Shell, 7 Years Shell Surface, 5 Years Plumbing Component Leaks, 5 Years Equipment and Controls, 5 Years Cabinet, 2 Years Jets, 2 Years Lights, 1 Year Stereo Export (50 Hz): 10 Years Shell, 7 Years Shell Surface, 5 Years Plumbing Component Leaks, 5 Years Equipment and Controls, 5 Years Cabinet, 2 Years Jets, 2 Years Lights, 2 Years Stereo
Waterfall Feature:	On/Off Flow Rate on when pump 1 is running; Colored Lighting
Audio System (Optional):	Factory Installed BLUEWAVE® Spa Stereo System with an Auxiliary 3.5 mm headphone jack connection and Bluetooth® compatible
Special Features (Standard):	SmartTub® module Export: SmartTub® module (optional)




*(See Warranty Document for Specific Details)

** (See Important Safety Instructions for Specific Details)

Sundance Spas 780 Dover

Operation/Seat Depths

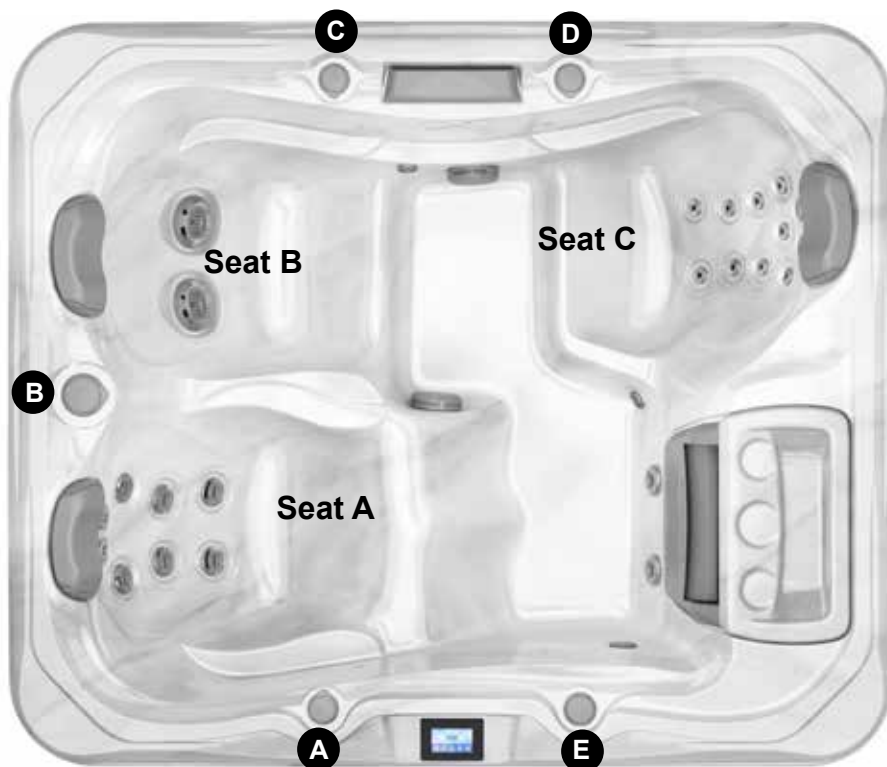

- (A)** Air Control - Activates Seat A Jets (2 SMT Micro, 6 SMT Fluidix, 2 Mini Vortex)
- (B)** Massage Selector [Pump 1]- Adjusts Massage Level Between Seat A Jets + Seat B Jets and Seat C Jets
- (C)** Air Control - Activates Seat B Jets (2 Fluidix Intelli-Jets)
- (D)** Air Control - Activates Seat C Jets (2 SMT Micro, 9 Accu-Pressure)
- (E)** Waterfall Selector [Pump 1] - Controls Waterfall Output

23 Total Jets (Stainless Steel Escutcheons Standard)



Spa Operation Subject To Change Without Notice

SEAT DEPTHS

- A = 24.50" (62.23 cm)**
- B = 26.63" (67.63 cm)**
- C = 25.75" (65.41 cm)**
- D = 26.50" (67.31 cm)**

Listed dimensions represent distance from top of acrylic to lowest point in seat. **Tolerance $\pm 0.5"$ (1.27 cm).**




Dimensions/Specifications Subject To Change Without Notice

Sundance Spas 780 Dover


Portable Dimensions

TOP VIEW

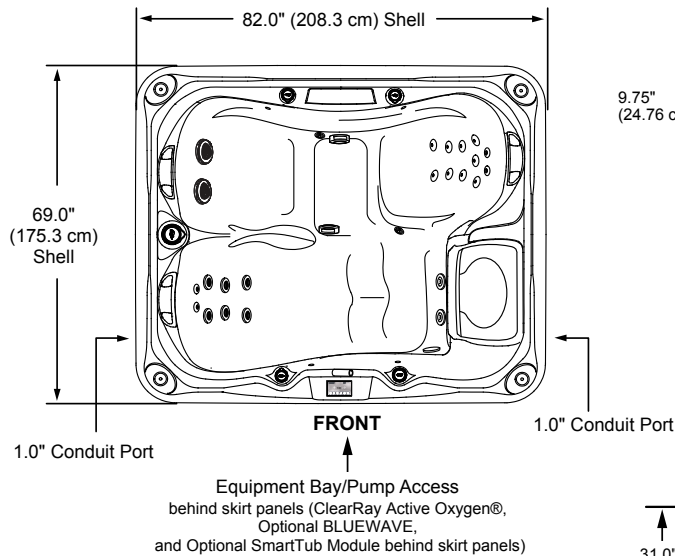


FRONT VIEW

Tolerance: $\pm 0.5"$ (1.27 cm)

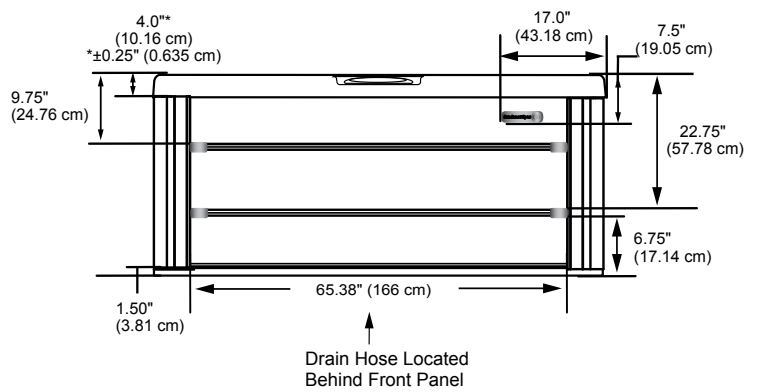

RIGHT SIDE VIEW


Tolerance: $\pm 0.5"$ (1.27 cm)

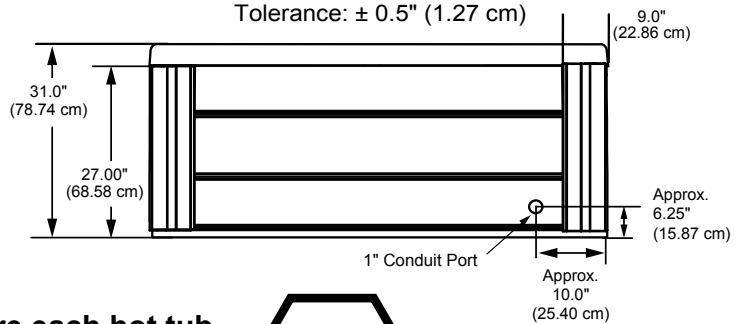

STOP

IMPORTANT! Always measure each hot tub for exact dimensions BEFORE designing its foundational support and/or decking.

STOP

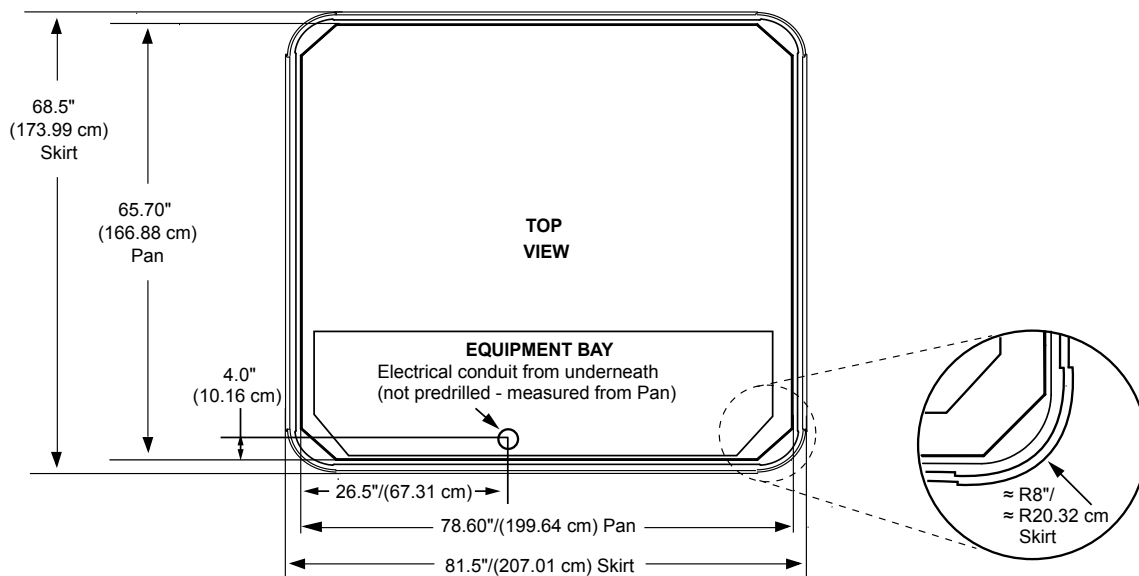

Dimensions/specifications subject to change without notice. Tolerance: $\pm 0.5"$ (1.27 cm)

Dimensions/Specifications Subject To Change Without Notice