

Sundance® Spas 780 Montclair™

Specifications

Dimensions:	75" x 91" x 34.5" (191 cm x 231 cm x 88 cm)
Seating Capacity:	4-5 Adults
Dry Weight:	790 lbs (359 kg)
Filled Weight (Average Fill)**:	3,292 lbs (1,494 kg)
Water Capacity (Average Fill):	300 US Gal (1,136 Liters)
Controls:	Solid-State Electronic Touchscreen Controls, Programmable Water Temperature, Filtration, and Heat Cycles
Water Delivery:	2 High Flow Pump
Pump 1:	North America (60 Hz): 1-Speed/2.5 HP Continuous, 12A Max., 56 Frame Export (50 Hz): 1-Speed/2.0 HP continuous, 8.0A Max.
Pump 2:	North America (60 Hz): 1-Speed/2.5 HP Continuous, 11A Max., 56 Frame Export (50 Hz): 1-Speed/2.0 HP Continuous, 7.0A Max.
Pump 3:	24 Hour Programmable Circ Pump, 8 Hour Factory Default
Total Hydrojets:	30
Seat A Jets:	6 SMT Fluidix, 2 Adjustable Accu-Pressure, 2 Mini Vortex
Seat B Jets:	1 Vortex
Seat C Jets:	2 SMT Micro, 9 Accu-Pressure
Seat D Jets:	4 Mini Vortex, 2 Fluidix Intelli-Jets
Footwell Jets (E):	2 Mini Vortex
Air Controls/Massage Selectors:	3/1 Standard air control with LED lights
Filter:	MicroClean® Ultra II Lite Filtration System, 130 ft² (2 interlocking cartridge filters)
Water Treatment:	8-Hour Circulation Pump; Factory installed ClearRay Active Oxygen® System Export: ClearRay Active Oxygen® System
Lighting:	Standard Multi-Colored LED Light; 6 LED Pin Lights; Indicator light; Air controls and Exterior Lights (4 stainless steel white lights on front cabinet)
Synthetic Cabinet:	Available in Modern Hardwood, Brushed Gray and Vintage Oak
Shell Colors:	Platinum, Celestite, Morning Mist, Midnight, Travertine, Monaco (while quantities last)
Handrails:	N/A
Headrests:	Three, 1-Piece Gray
Heater:	North America Model (60 Hz): High Flow 5.5 kW@240 VAC; Export (50 Hz): High Flow, 2.7 kW
Electrical Requirements:	North America Model (60 Hz): 240 VAC@40A, 50A or 60A Export (50 Hz): 230-240 VAC@1x32A, 1x16A/1x20A, or 3x16A (see manual for more configurations); or Suitably Rated Circuit Breaker to Comply with Local Electrical Regulations. Certain Countries May Require Dual Power Inputs; Two GFCI/RCD Breakers are Required for This Configuration.
Limited Warranty*:	North America (60 Hz): 10 Years Shell, 7 Years Shell Surface, 5 Years Plumbing Component Leaks, 5 Years Equipment and Controls, 5 Years Cabinet, 2 Years Jets, 2 Years Lights, 1 Year Stereo Export (50 Hz): 10 Years Shell, 7 Years Shell Surface, 5 Years Plumbing Component Leaks, 5 Years Equipment and Controls, 5 Years Cabinet, 2 Years Jets, 2 Years Lights, 2 Years Stereo
Waterfall Feature:	On/Off Flow Rate on when circulation pump is running; Colored Lighting
Audio System (Optional):	Factory Installed BLUEWAVE® Spa Stereo System with an Auxiliary 3.5 mm headphone jack connection and Bluetooth® compatible
Special Features (Standard):	SmartTub® module Export: SmartTub® module (optional)




*(See Warranty Document for Specific Details)

***(See Important Safety Instructions for Specific Details)

Sundance Spas 780 Montclair


Operation/Seat Depths

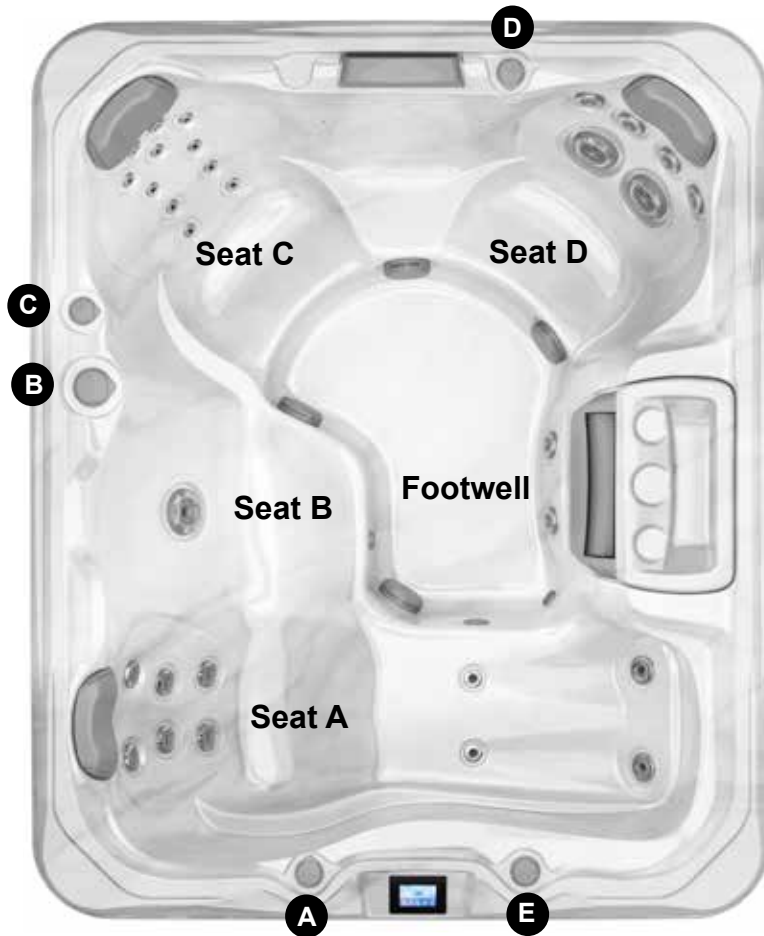

- (A) Air Control - Activates Seat A Jets (6 SMT Fluidix, 2 Adjustable Accu-Pressure, 2 Mini Vortex)
- (B) Massage Selector [Pump 1]- Adjusts Massage Level Between Seat A Jets and Seat C Jets
- (C) Air Control - Activates Seat C Jets (2 SMT Micro, 9 Accu-Pressure)
- (D) Air Control - Activates Seat B Jets (1 Vortex) + Seat D Jets (4 Mini Vortex, 2 Fluidix Intelli-Jets) + Footwell Jets (2 Mini Vortex)
- (E) Waterfall Selector [8-Hour Circ. Pump] - Controls Waterfall Output

• Jets Pump 2: Seat B Jets + Seat D Jets + Footwell Jets are always on when the jets pump is running

30 Total Jets (Stainless Steel Escutcheons Standard)



Spa Operation Subject To Change Without Notice

SEAT DEPTHS

A = 24.63" (62.55 cm)
B = 24.63" (62.55 cm)
C = 27.75" (70.49 cm)
D = 22.75" (57.79 cm)
E = 25.75" (65.41 cm)
F = 30.38" (77.15 cm)

Listed dimensions represent distance from top of acrylic to lowest point in seat. **Tolerance $\pm 0.5"$ (1.27 cm).**




Dimensions/Specifications Subject To Change Without Notice

Sundance Spas 780 Montclair

Portable Dimensions

TOP VIEW

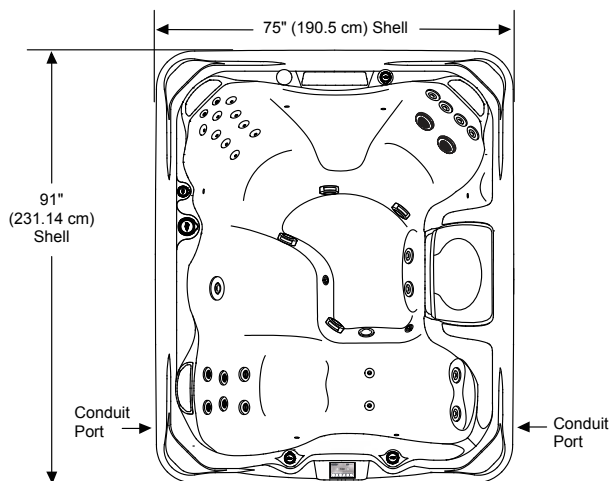


FRONT

Equipment Bay/Pump Access
behind skirt panels (ClearRay Active Oxygen®,
Optional BLUEWAVE,
and Optional SmartTub Module behind skirt panels)


FRONT/BACK VIEW

Tolerance: $\pm 0.5"$ (1.27 cm)

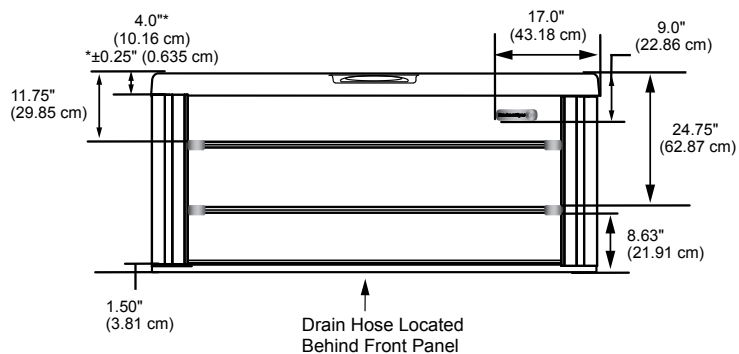

RIGHT SIDE VIEW


Tolerance: $\pm 0.5"$ (1.27 cm)

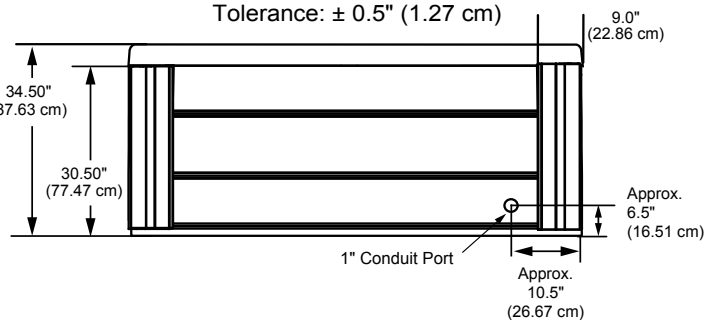

STOP

IMPORTANT! Always measure each hot tub for exact dimensions BEFORE designing its foundational support and/or decking.

STOP

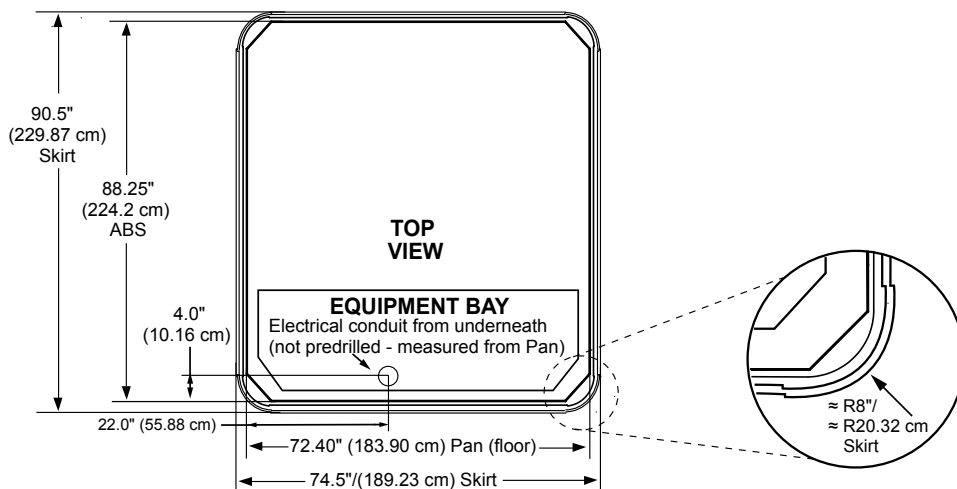

Dimensions/specifications subject to change without notice. Tolerance: $\pm 0.5"$ (1.27 cm)

Dimensions/Specifications Subject To Change Without Notice