

# Sundance® Spas 880 Aspen®

## Specifications

<b>Dimensions:</b>	89" x 110" x 40" (226 cm x 280 cm x 102 cm)
<b>Seating Capacity:</b>	7-8 Adults
<b>Dry Weight:</b>	1,240 lbs (563 kg)
<b>Filled Weight (Average Fill)**:</b>	5,577 lbs (2,530 kg)
<b>Water Capacity (Average Fill):</b>	520 US Gal (1,969 Liters)
<b>Controls:</b>	880 Touchscreen Control, Displays Temperature, Time, Cycles and Jet/Air System Control. Offers Customizing of Filtration Cycles, Lighting, Water Temperature Setting and other features
<b>Water Delivery:</b>	3 TheraMax High-Flow Pumps and 8-Hour Dynamic Flow Circulation System
<b>Pump 1:</b>	North America (60 Hz): 1-Speed/2.5 HP Continuous, 11.3A Max., 56 Frame <b>Export (50 Hz): 1-Speed/2.0 HP Continuous, 7A Max.</b>
<b>Pump 2:</b>	North America (60 Hz): 1-Speed/2.5 HP Continuous, 11.3A Max., 56 Frame <b>Export (50 Hz): 1-Speed/2.0 HP Continuous, 7A Max.</b>
<b>Pump 3:</b>	North America (60 Hz): 1-Speed/2.5 HP Continuous, 11.3A Max., 56 Frame <b>Export (50 Hz): 1-Speed/2.0 HP Continuous, 7A Max.</b>
<b>Pump 4:</b>	High-Output Dynamic Flow, 24-Hour programmable, factory default set to 8-Hour Filter/Circulation Pump (35 gpm) Programmable for Daily Start Time and Duration
<b>Total Hydrojets:</b>	<b>66</b>
<b>Seat A Jets:</b>	2 Fluidix Nex, 8 Fluidix Reflex, 2 Accu-Pressure
<b>Seat B Jets:</b>	2 Fluidix Reflex, 1 Vortex
<b>Seat C Jets:</b>	1 Vortex
<b>Seat D Jets:</b>	4 Fluidix Nex, 12 Fluidix ST, 4 Focus Relief, 1 Whirlpool (sidewall), 2 Accu-Pressure
<b>Seat E Jets:</b>	2 Fluidix Reflex
<b>Seat F Jets:</b>	4 Fluidix Nex, 4 Fluidix ST, 1 Fluidix Intelli-Jet, 1 Fluidix PT, 2 Focus Relief, 2 Accu-Pressure
<b>Seat G Jets:</b>	2 Fluidix Nex, 2 Vortex, 2 Fluidix PT, 2 Focus Relief, 1 Whirlpool (sidewall), 2 Accu-Pressure
<b>Air Blower:</b>	High-efficiency, 1-Speed
<b>Aromatherapy Delivery:</b>	6 Silent Air® Injector Jets with Quiet High Speed Air Pump
<b>Air Controls/Massage Selectors:</b>	7/2 (Standard air control with LED lights and massage selector with LED lights)
<b>Filter:</b>	MicroClean® Ultra II Filtration System, 130 ft² (2 interlocking cartridge filters)
<b>Water Treatment:</b>	Dynamic Flow Circulation System; Factory installed ClearRay Active Oxygen® System <b>Export: ClearRay Active Oxygen® System</b>
<b>Lighting:</b>	Multicolored LED Lighting System (1 Waterfall, 2 Underwater, 7 Air controls, 2 Massage Selectors, 1 Backlit handrail); Exterior lighting (white only)
<b>Skirt Cabinet (SunSide™):</b>	Windy Oak, Ironwood and Flint Gray
<b>Shell Colors:</b>	Platinum, Celestite, Morning Mist, Midnight, Travertine, Monaco (while quantities last)
<b>Handrails:</b>	One High Quality Stainless Steel with backlit LED lighting
<b>ComfortTone Headrests:</b>	Four, 1-Piece Gray
<b>Heater:</b>	Hi Flow 5.5 kW With Titanium Element <b>Export (50 Hz): Hi Flow 2.7 kW with Titanium Element</b>
<b>Electrical Requirements:</b>	North America (60 Hz): 240 VAC@50A or 60A; <b>Export (50 Hz): 230-240 VAC@1x32A, 1x16A/1x20A, 3x16A (see manual for more configurations); or Suitable Rated Circuit Breaker To Comply With Local Electrical Regulations. Certain Countries May Require 2 Power Inputs; Two GFCI/RCD Breakers are Required For This Configuration.</b>
<b>Limited Warranty*:</b>	North America (60 Hz): 10 Years Shell, 7 Years Shell Surface, 5 Years Plumbing Component Leaks, 5 Years Equipment and Controls, 5 Years Cabinet, 5 Years Jets, 2 Years Lights, 1 Year Stereo <b>Export (50 Hz): 10 Years Shell, 7 Years Shell Surface, 5 Years Plumbing Component Leaks, 5 Years Equipment and Controls, 5 Years Cabinet, 5 Years Jets, 2 Years Lights, 2 Years Stereo</b>
<b>Waterfall Feature:</b>	Adjustable Flow Rate; Colored Lighting
<b>Audio System (Optional):</b>	Factory Installed BLUEWAVE® 2.0 Wireless Spa Stereo System with Auxiliary 3.5 mm headphone jack connection, Bluetooth® compatible, 2 premium speakers and a powered subwoofer
<b>Special Features (Standard):</b>	SmartTub® module <b>Export: SmartTub® module (optional)</b>
<b>Special Features (Optional):</b>	Inductive Charger




\*(See Warranty Document for Specific Details)

\*\* (See Important Safety Instructions for Specific Details)


# Sundance Spas 880 Aspen

## Operation/Seat Depths

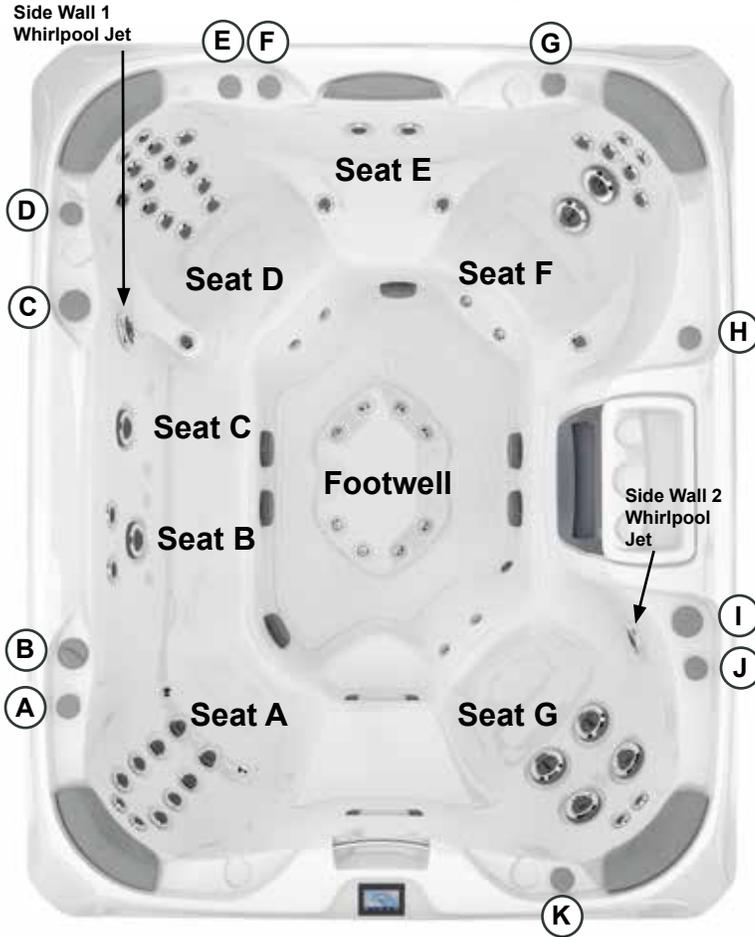

- (A)** Air Control - Activates Seat A Jets (2 Fluidix Nex, 8 Fluidix Reflex, 2 Accu-Pressure), Seat B Jets (2 Fluidix Reflex, 1 Vortex) and Seat C Jet (1 Vortex)
- (B)** SunScents Dispenser
- (C)** Massage Selector [Pump 2] - Adjusts Massage Level Between Seat D Jets and Seat G Jets
- (D)** Air Control - Activates Upper Seat D Jets (4 Fluidix Nex, 6 Fluidix-ST)
- (E)** Air Control - Activates Lower Seat D Jets (6 Fluidix-ST, 2 Accu-Pressure)
- (F)** Air Control - Activates Seat D Side Wall Whirlpool Jet
- (G)** Waterfall Selector [8-Hour Circ. Pump] - Controls Waterfall Output
- (H)** Air Control - Activates Seat E (2 Fluidix Reflex) + Seat F Jets (4 Fluidix Nex, 4 Fluidix ST, 1 Fluidix Intelli-Jet, 1 Fluidix PT, 2 Accu-Pressure)
- (I)** Massage Selector [Pump 1] - Adjusts Massage Level Between Seat A Jets + Seat B Jets + Seat C Jets and Seat D Side Wall Whirlpool Jet + Seat G Side Wall Whirlpool Jet
- (J)** Air Control - Activates Seat G Side Wall 1 Whirlpool Jet
- (K)** Air Control - Activates Seat G Jets (2 Fluidix Nex, 2 Vortex, 2 Fluidix PT Jets, 2 Accu-Pressure)

### 66 Total Jets

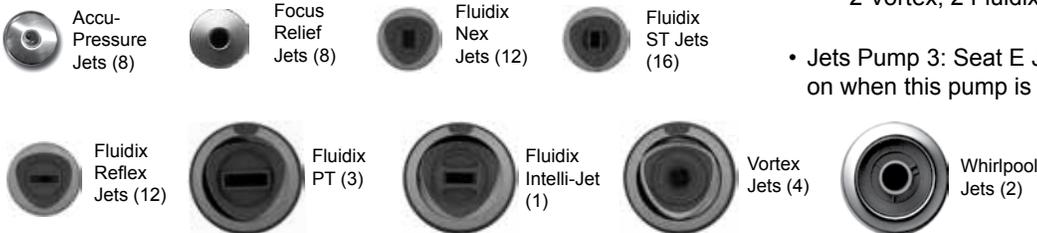

- Jets Pump 3: Seat E Jets and Seat F Jets are always on when this pump is running

Spa Operation Subject To Change Without Notice

## SEAT DEPTHS

**A = 26.00" (66.04 cm)**  
**B = 26.00" (66.04 cm)**  
**C = 26.00" (66.04 cm)**  
**D = 28.00" (71.12 cm)**  
**E = 19.00" (48.26 cm)**  
**F = 26.00" (66.04 cm)**

**G = 26.00" (66.04 cm)**  
**H = 18.00" (45.72 cm)**  
**I = 35.00" (88.90 cm)**




Listed dimensions represent distance from top of acrylic to lowest point in seat. **Tolerance ± 0.5" (1.27 cm).**



Dimensions/Specifications Subject To Change Without Notice

# Sundance Spas 880 Aspen


## Portable Dimensions

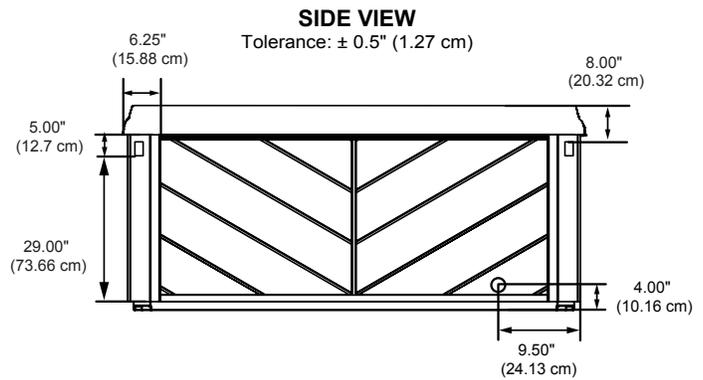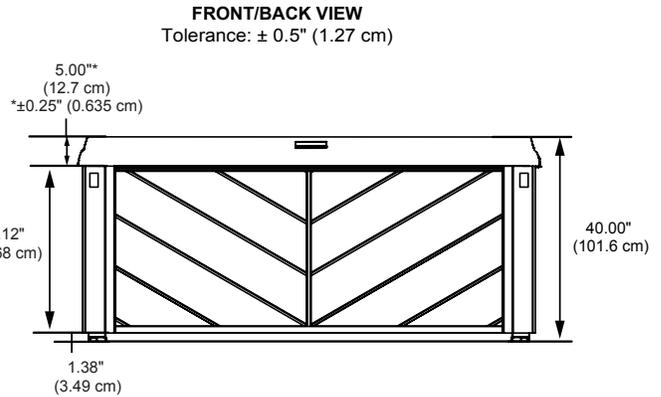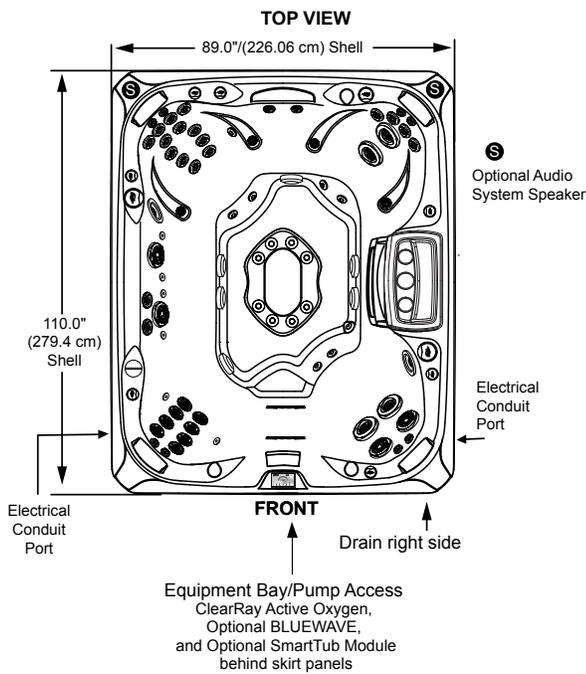

**NOTE:** Over time the panel(s) may bow, this is considered normal. The panels will straighten out when reinstalled into the mounting channel. Place one end of the panel into the channel first then flatten the panel and insert the other end.



**IMPORTANT!** Always measure each hot tub for exact dimensions **BEFORE** designing its foundational support and/or decking.

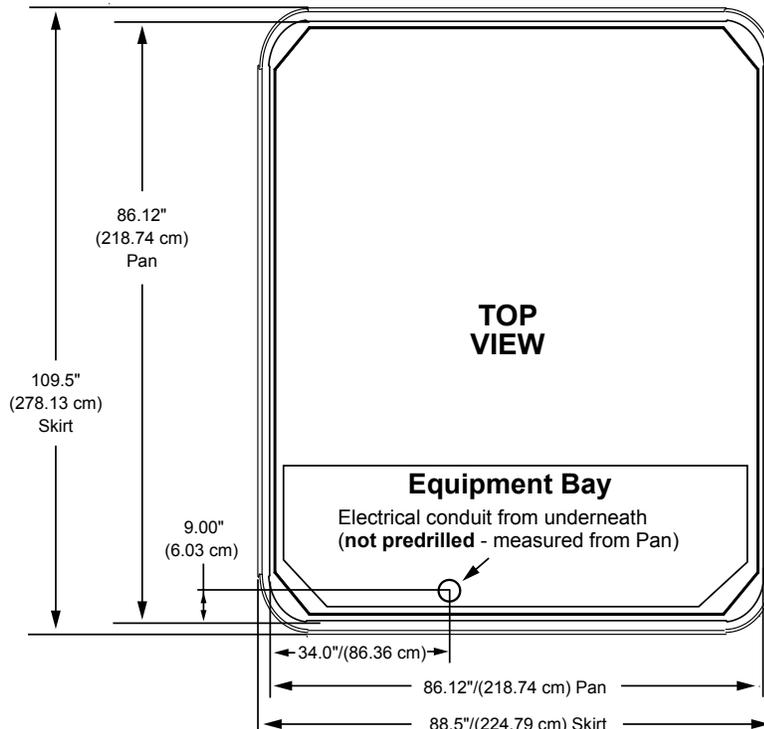

Dimensions/specifications subject to change without notice. Tolerance:  $\pm 0.5"$  (1.27 cm)

Dimensions/Specifications Subject To Change Without Notice