

# Sundance® Spas 880 Capri®

## Specifications

|  |   |
|--|---|
| <b>Dimensions:</b> .....                     | 69" x 82" x 30.5" (175 cm x 208 cm x 78 cm)   |
| <b>Seating Capacity:</b> .....               | 2-3 Adults  |
| <b>Dry Weight:</b> .....                     | 660 lbs (300 kg)  |
| <b>Filled Weight (Average Fill)**:</b> ..... | 2,662 lbs (1,208 kg)  |
| <b>Water Capacity (Average Fill):</b> .....  | 240 US Gal (909 Liters)   |
| <b>Controls:</b> .....                       | 880 Touchscreen Control, Displays Temperature, Time, Cycles and Jet/Air System Control. Offers Customizing of Filtration Cycles, Lighting, Water Temperature Setting and other features   |
| <b>Water Delivery:</b> .....                 | 1 TheraMax High-Flow Pump and 8-Hour Dynamic Flow Circulation System  |
| <b>Pump 1:</b> .....                         | North America (60 Hz): 1-Speed/2.5 HP Continuous, 11.3A Max., 56 Frame<br><b>Export (50 Hz): 1-Speed/2.0 HP Continuous, 7.0A Max.</b>   |
| <b>Pump 2:</b> .....                         | High Output Dynamic Flow, 24-Hour programmable, factory default set to 8-Hour Filter/ Circulation Pump (35 gp m), Programmable for Daily Start Time and Duration  |
| <b>Total Hydrojets:</b> .....                | <b>36</b>   |
| <b>Seat A Jets:</b> .....                    | 12 Fluidix ST, 2 Fluidix Nex, 4 Focus-Relief, 4 Accu-Pressure   |
| <b>Seat B Jets:</b> .....                    | 6 Fluidix Reflex, 2 Fluidix Nex, 4 Focus-Relief, 2 Vortex   |
| <b>Air Blower:</b> .....                     | High-Efficiency, 1-Speed  |
| <b>Aromatherapy Delivery:</b> .....          | 4 Air Injector Jets with Quiet High Speed Air Pump  |
| <b>Air Controls/Massage Selectors:</b> ..... | 2/1 (Standard air control with LED lights and massage selector with LED lights)   |
| <b>Filter:</b> .....                         | MicroClean® Ultra II Filtration System, 130 ft² (2 interlocking cartridge filters)  |
| <b>Water Treatment:</b> .....                | Dynamic Flow Circulation System; Factory installed ClearRay Active Oxygen® System<br><b>Export: ClearRay Active Oxygen® System</b>  |
| <b>Lighting:</b> .....                       | Multi-Colored LED Lighting System (1 Waterfall, 1 Underwater, 2 Air controls, 1 Massage Selectors); Exterior lighting (white only)  |
| <b>Skirt Cabinet (SunSide™):</b> .....       | Windy Oak, Ironwood and Flint Gray  |
| <b>Shell Colors:</b> .....                   | Platinum, Celestite, Morning Mist, Midnight, Travertine, Monaco (while quantities last)   |
| <b>Handrails:</b> .....                      | 1 Integral  |
| <b>ComforTone Headrests:</b> .....           | Two, 1-Piece Gray   |
| <b>Heater:</b> .....                         | North America (60 Hz): Hi Flow 5.5 kW with Titanium Element<br><b>Export (50 Hz): Hi Flow 2.7 kW with Titanium Element</b>  |
| <b>Electrical Requirements:</b> .....        | North America (60 Hz): 240 VAC@40A or 50A;<br><b>Export (50 Hz): 230-240 VAC@1x16A, 2x16A (see manual for more configurations); or Suitably Rated Circuit Breaker to Comply with Local Electrical Regulations. Certain Countries May Require Dual Power Inputs; Two GFCI/RCD Breakers are Required for This Configuration.</b>  |
| <b>Limited Warranty*:</b> .....              | North America (60 Hz): 10 Years Shell, 7 Years Shell Surface, 5 Years Plumbing Component Leaks, 5 Years Equipment and Controls, 5 Years Cabinet, 5 Years Jets, 2 Years Lights, 1 Year Stereo<br><b>Export (50 Hz): 10 Years Shell, 7 Years Shell Surface, 5 Years Plumbing Component Leaks, 5 Years Equipment and Controls, 5 Years Cabinet, 5 Years Jets, 2 Years Lights, 2 Years Stereo</b> |
| <b>Waterfall Feature:</b> .....              | Adjustable Flow Rate; Colored Lighting  |
| <b>Audio System (Optional):</b> .....        | Factory Installed BLUEWAVE® 2.0 Wireless Spa Stereo System with Auxiliary 3.5 mm headphone jack connection, Bluetooth® compatible, 2 premium speakers and a powered subwoofer   |
| <b>Special Features (Standard):</b> .....    | SmartTub® module<br><b>Export: SmartTub® module (optional)</b>  |
| <b>Special Features (Optional):</b> .....    | Inductive Charger   |



\*(See Warranty Document for Specific Details)

\*\*\*(See Important Safety Instructions for Specific Details)

# Sundance Spas 880 Capri


## Operation/Seat Depths



- (A)** Sunscents Dispenser
- (B)** Air Control - Activates Seat A Jets (12 Fluidix-ST, 2 Fluidix Nex, 4 Accu-Pressure)
- (C)** Massage Selector - Adjusts Massage Level Between Seat A Jets and Seat B Jets
- (D)** Air Control - Activates Seat B Jets (6 Fluidix Reflex, 2 Fluidix Nex, 2 Vortex)
- (E)** Waterfall Selector [8-Hour Circ. Pump] - Controls Waterfall Output

- Focus-Relief Jets: Work with both the blower and Jets Pump 1. The blower introduces air to the jet and the Jets Pump forces water through.

### 36 Total Jets

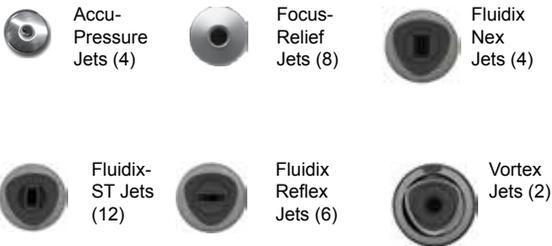


Spa Operation Subject To Change Without Notice

## SEAT DEPTHS

- A = 24.00" (60.96 cm)**
- B = 24.50" (62.23 cm)**
- C = 12.00" (30.48 cm)**




Listed dimensions represent distance from top of acrylic to lowest point in seat. **Tolerance ± 0.5" (1.27 cm).**




Dimensions/Specifications Subject To Change Without Notice

# Sundance Spas 880 Capri

## Portable Dimensions

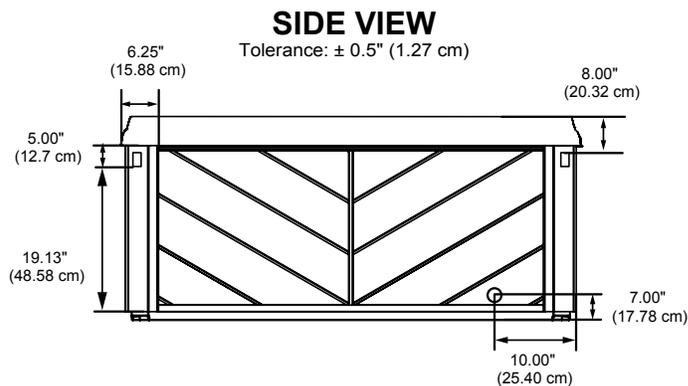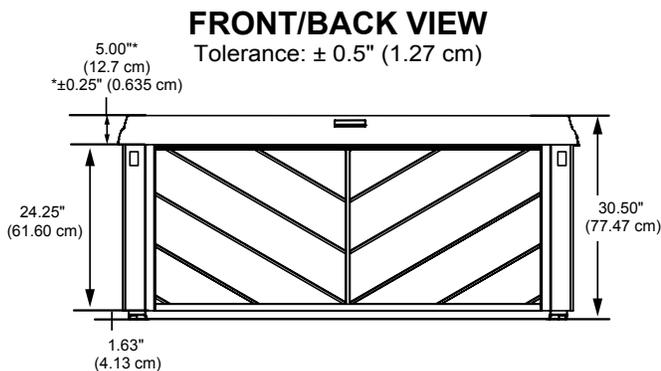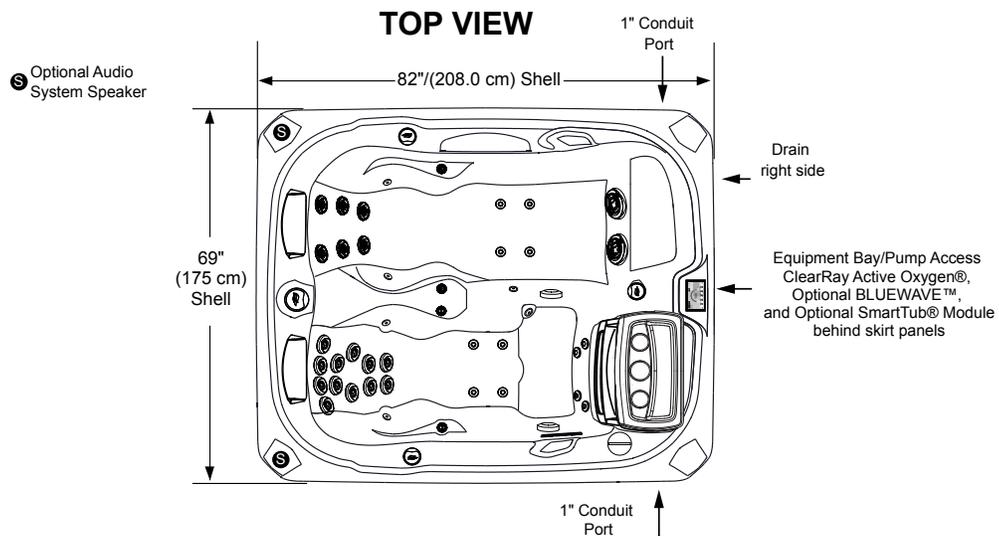

**IMPORTANT! Always measure each hot tub for exact dimensions BEFORE designing its foundational support and/or decking.**

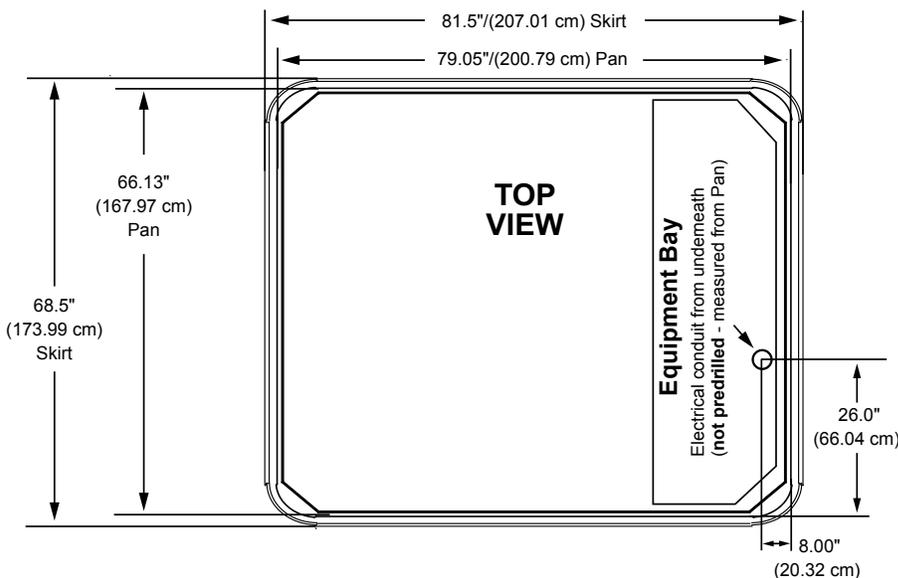

**NOTE:** Over time the panel(s) may bow, this is considered normal. The panels will straighten out when reinstalled into the mounting channel. Place one end of the panel into the channel first then flatten the panel and insert the other end.

Dimensions/specifications subject to change without notice. Tolerance:  $\pm 0.5"$  (1.27 cm)

Dimensions/Specifications Subject To Change Without Notice