



Sundance® Spas 880 Optima® Specifications

Dimensions:	89" x 89" x 37" (226 cm x 226 cm x 94 cm)
Seating Capacity:	6-7 Adults
Dry Weight:	944 lbs (429 kg)
Filled Weight (Average Fill)**:	4,363 lbs (1,980 kg)
Water Capacity (Average Fill):	410 US Gal (1,553 Liters)
Controls:	880 Touchscreen Control, Displays Temperature, Time, Cycles and Jet/Air System Control. Offers Customizing of Filtration Cycles, Lighting, Water Temperature Setting and other features
Water Delivery:	2 TheraMax High-Flow Pumps and 8-Hour Dynamic Flow Circulation System
Pump 1:	North America (60 Hz): 1-Speed/2.5 HP Continuous, 11.3A Max., 56 Frame Export (50 Hz): 1-Speed/2.0 HP Continuous, 7.0A Max.
Pump 2:	North America (60 Hz): 1-Speed/2.5 HP Continuous, 11.3A Max., 56 Frame Export (50 Hz): 1-Speed/2.0 HP Continuous, 7.0A Max.
Pump 3:	High Output Dynamic Flow, 24-Hour programmable, factory default set to 8-Hour Filter/Circulation Pump (35 gpm); Programmable for Daily Start Time and Duration
Total Hydrojets:	49
Seat A Jets:	2 Fluidix Intelli-Jet, 1 Fluidix PT, 2 Focus Relief
Seat B Jets:	2 Vortex
Seat C Jets:	12 Fluidix ST, 4 Fluidix Nex, 1 Whirlpool (sidewall), 4 Focus Relief
Rear Wall Jet (D):	1 Vortex
Seat E Jets:	1 Fluidix Intelli-Jet, 1 Fluidix PT, 2 Fluidix Nex, 4 Fluidix ST
Seat F Jets:	2 Vortex, 2 Fluidix PT
Footwell Jets (G):	8 Accu-Pressure
Air Blower:	High-Efficiency, 1-Speed
Aromatherapy Delivery:	8 Air Injector Jets with Quiet High Speed Air Pump
Air Controls/Massage Selectors:	5/2 (Standard air control with LED lights and massage selector with LED lights)
Filter:	MicroClean® Ultra II Filtration System, 130 ft ² (2 interlocking cartridge filters)
Water Treatment:	Dynamic Flow Circulation System; Factory installed ClearRay Active Oxygen® System Export: ClearRay Active Oxygen® System
Lighting:	Multi-Colored LED Lighting System (1 Waterfall, 2 Underwater, 5 Air controls, 2 Massage Selectors, 1 Backlit handrail); Exterior lighting (white only)
Skirt Cabinet (SunSide™):	Windy Oak, Ironwood and Flint Gray
Shell Colors:	Platinum, Celestite, Morning Mist, Midnight, Travertine, Monaco (while quantities last)
Handrails:	One High Quality Stainless Steel with backlit LED lighting
ComfortTone Headrests:	Four, 1-Piece Gray
Heater:	North America (60 Hz): Hi Flow 5.5 kW with Titanium Element Export (50 Hz): Hi Flow 2.7 kW with Titanium Element
Electrical Requirements:	North America (60 Hz): 240 VAC@40A, 50A or 60A; Export (50 Hz): 230-240 VAC@1x32A or 1x16A/1x20A, 3x16A (see manual for more configurations); or Suitably Rated Circuit Breaker to Comply with Local Electrical Regulations. Certain Countries may Require 2 Power Inputs; Two GFCI/RCD Breakers are Required for This Configuration.
Limited Warranty*:	North America (60 Hz): 10 Years Shell, 7 Years Shell Surface, 5 Years Plumbing Component Leaks, 5 Years Equipment and Controls, 5 Years Synthetic Cabinet, 5 Years Jets, 2 Years Lights, 1 Year Stereo Export (50 Hz): 10 Years Shell, 7 Years Shell Surface, 5 Years Plumbing Component Leaks, 5 Years Equipment and Controls, 5 Years Synthetic Cabinet, 5 Years Jets, 2 Years Lights, 2 Years Stereo
Waterfall Feature:	Adjustable Flow Rate; Colored Lighting
Audio System (Optional):	Factory Installed BLUEWAVE® 2.0 Wireless Spa Stereo System with Auxiliary 3.5 mm headphone jack connection, Bluetooth® compatible, 2 premium speakers and a powered subwoofer
Special Features (Standard):	SmartTub® module Export: SmartTub® module (optional)
Special Features (Optional):	Inductive Charger




Sundance Spas 880 Optima

Operation/Seat Depths

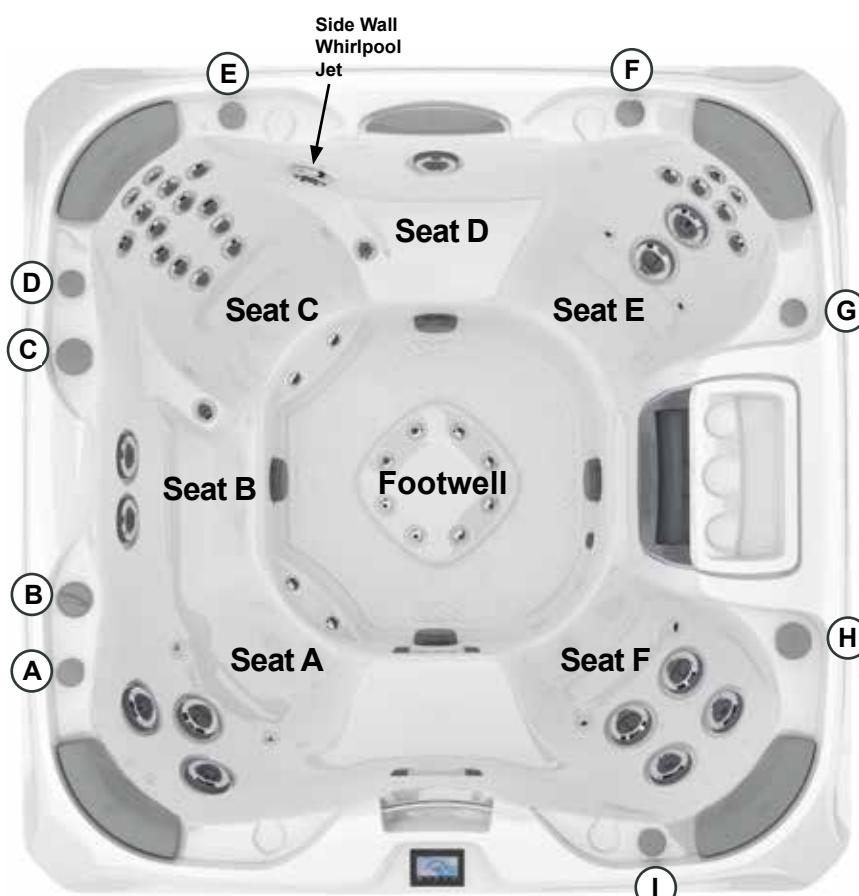

49 Total Jets

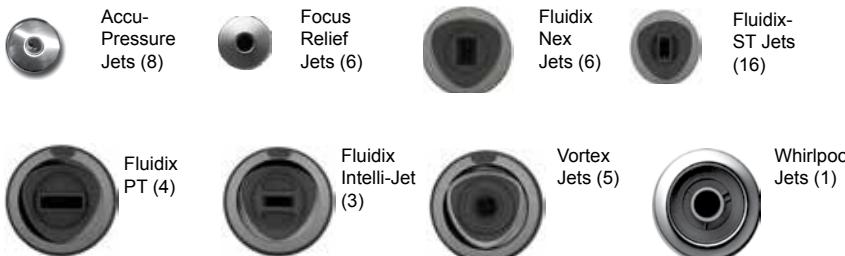

Spa Operation Subject To Change Without Notice

SEAT DEPTHS

A = 26.00" (66.04 cm)

B = 21.25" (53.98 cm)

C = 28.00" (71.12 cm)

D = 18.50" (46.99 cm)


E = 26.00" (66.04 cm)

F = 26.00" (66.04 cm)

G = 17.00" (43.18 cm)

H = 32.50" (82.55 cm)


Listed dimensions represent distance from top of acrylic to lowest point in seat. **Tolerance ± 0.5"** (1.27 cm).

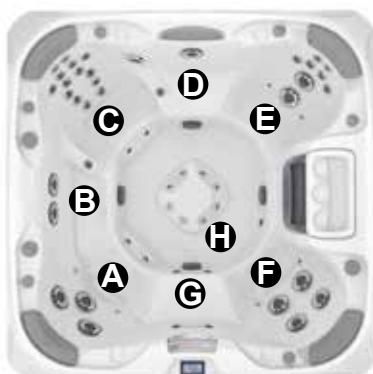


Dimensions/Specifications Subject To Change Without Notice

Sundance Spas 880 Optima

Portable Dimensions

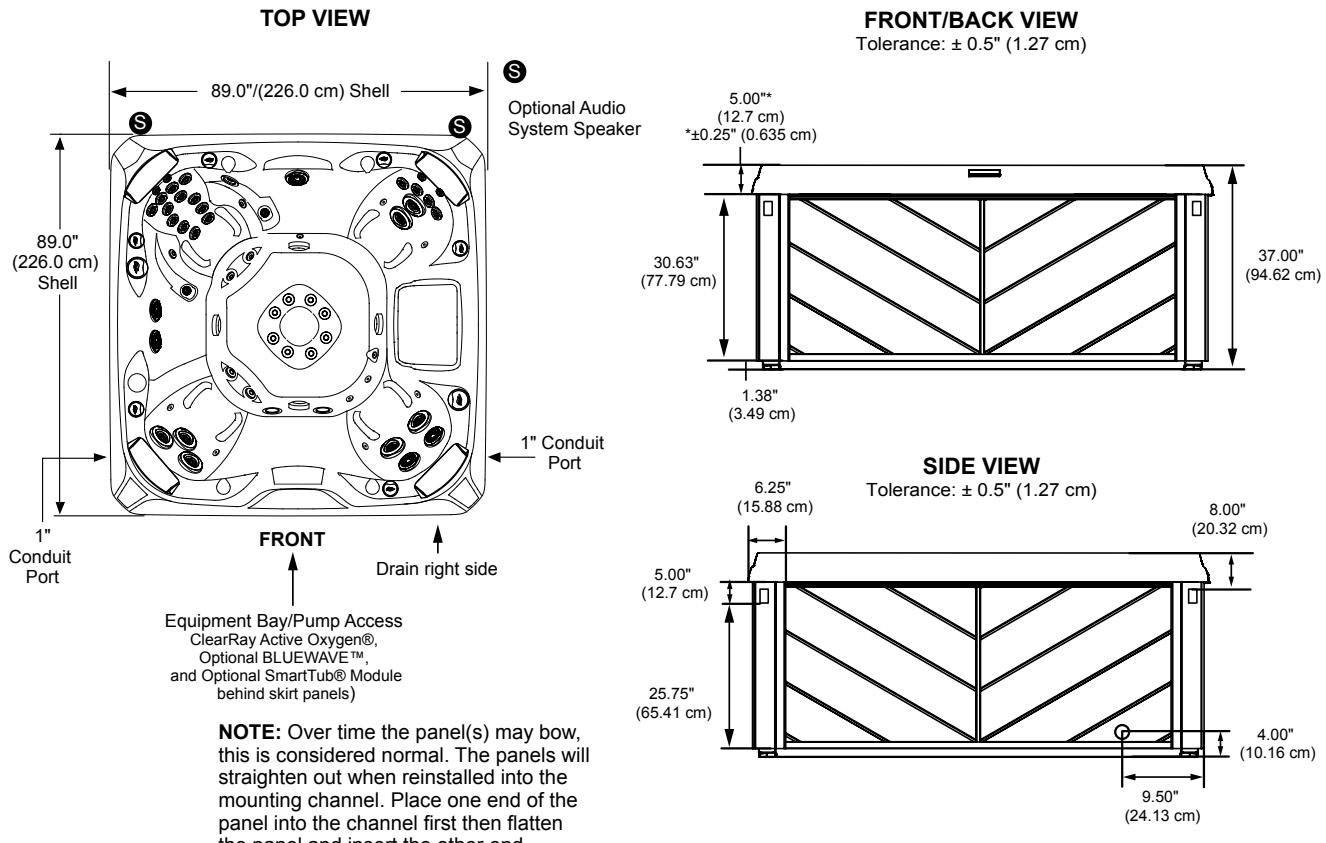

IMPORTANT! Always measure each hot tub for exact dimensions BEFORE designing its foundational support and/or decking.

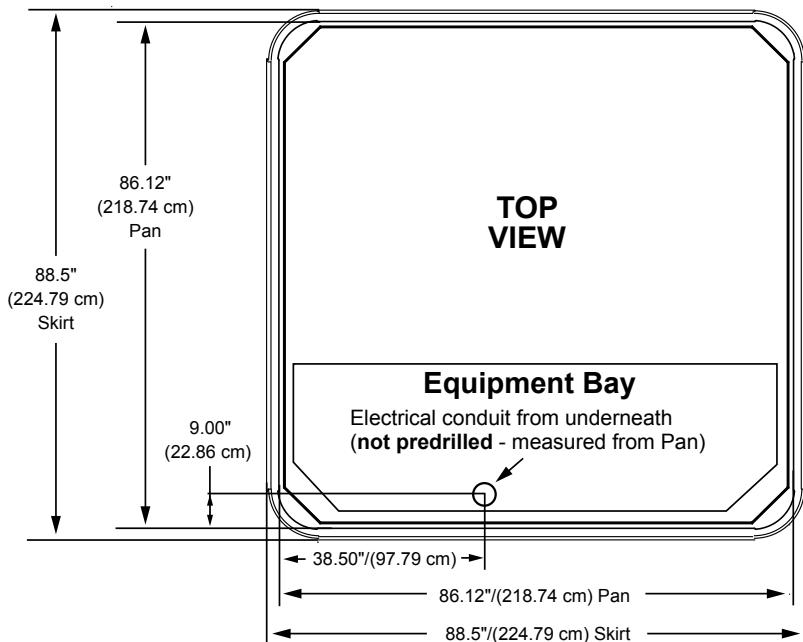

Dimensions/specifications subject to change without notice. Tolerance: $\pm 0.5"$ (1.27 cm)

Dimensions/Specifications Subject To Change Without Notice